

# Probabilistic Robotics




## Probabilistic Motion and Sensor Models

Some slides adopted from: Wolfram Burgard, Cyrill Stachniss, Maren Bennewitz, Kai Arras and Probabilistic Robotics Book

# Sensors for Mobile Robots

- **Contact sensors:** Bumpers
- **Internal sensors**
  - Accelerometers (spring-mounted masses)
  - Gyroscopes (spinning mass, laser light)
  - Compasses, inclinometers (earth magnetic field, gravity)
- **Proximity sensors**
  - Sonar (time of flight)
  - Radar (phase and frequency)
  - Laser range-finders (triangulation, tof, phase)
  - Infrared (intensity)
- **Visual sensors:** Cameras
- **Satellite-based sensors:** GPS

# Proximity Sensors

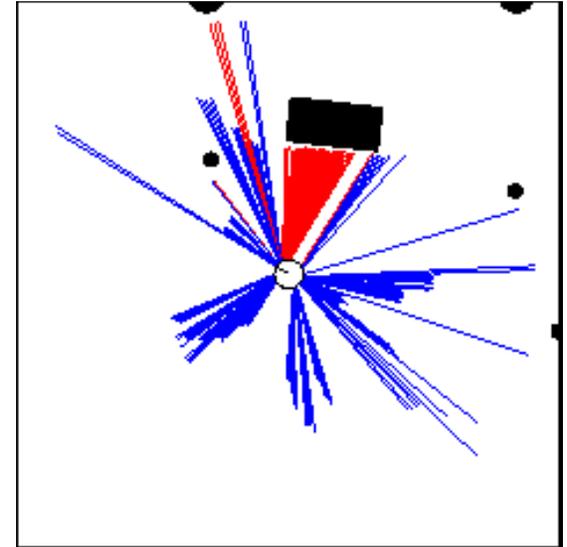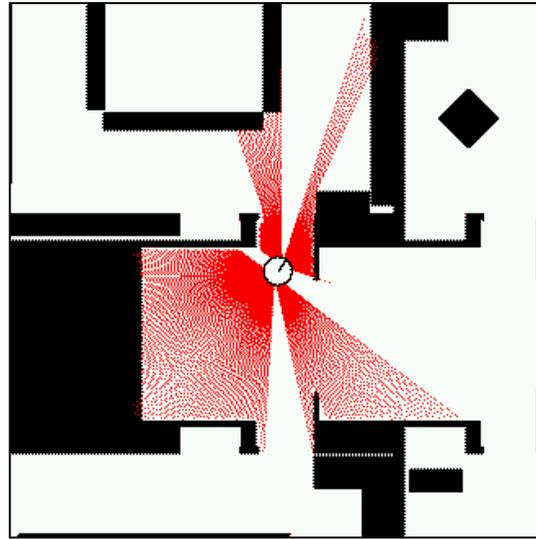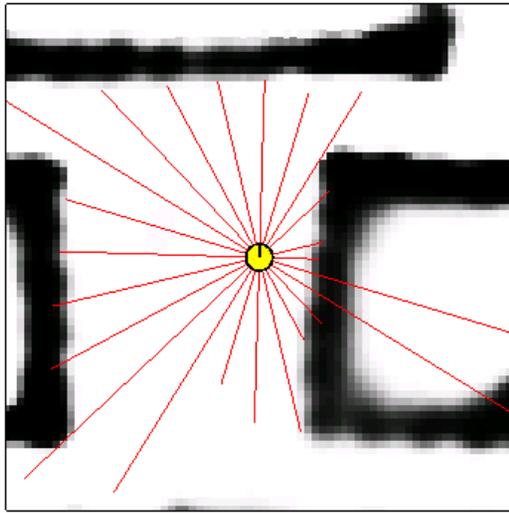

- The central task is to determine  $P(z|x)$ , i.e., the probability of a measurement  $z$  given that the robot is at position  $x$ .
- **Question**: Where do the probabilities come from?
- **Approach**: Let's try to explain a measurement.

# Beam-based Sensor Model




- Scan  $z$  consists of  $K$  measurements.

$$z = \{z_1, z_2, \dots, z_K\}$$

- Individual measurements are independent given the robot position.

$$P(z | x, m) = \prod_{k=1}^K P(z_k | x, m)$$


# Beam-based Sensor Model

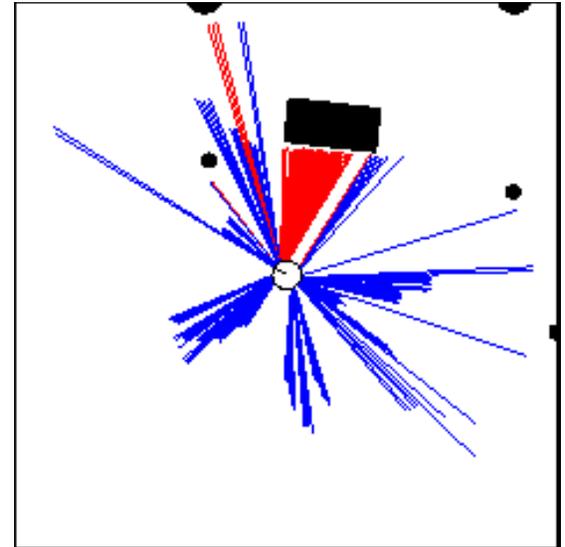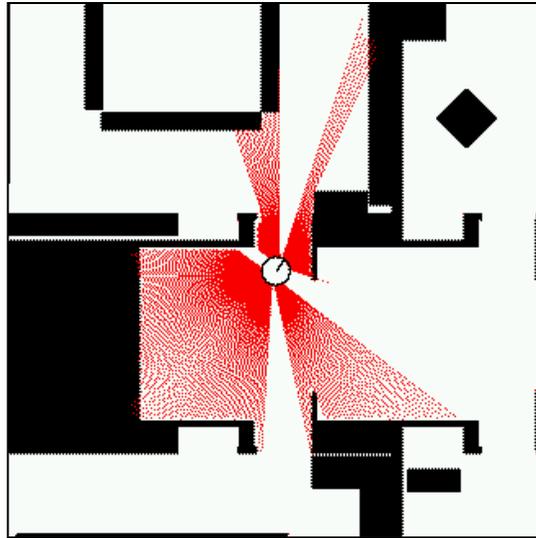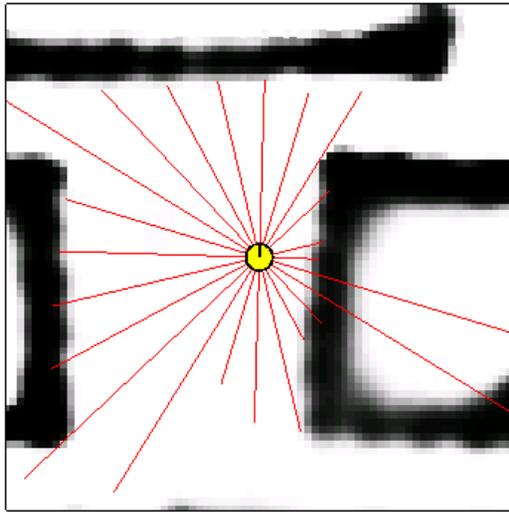

$$P(z | x, m) = \prod_{k=1}^K P(z_k | x, m)$$

# Typical Measurement Errors of an Range Measurements

1. Beams reflected by obstacles
2. Beams reflected by persons / caused by crosstalk
3. Random measurements
4. Maximum range measurements

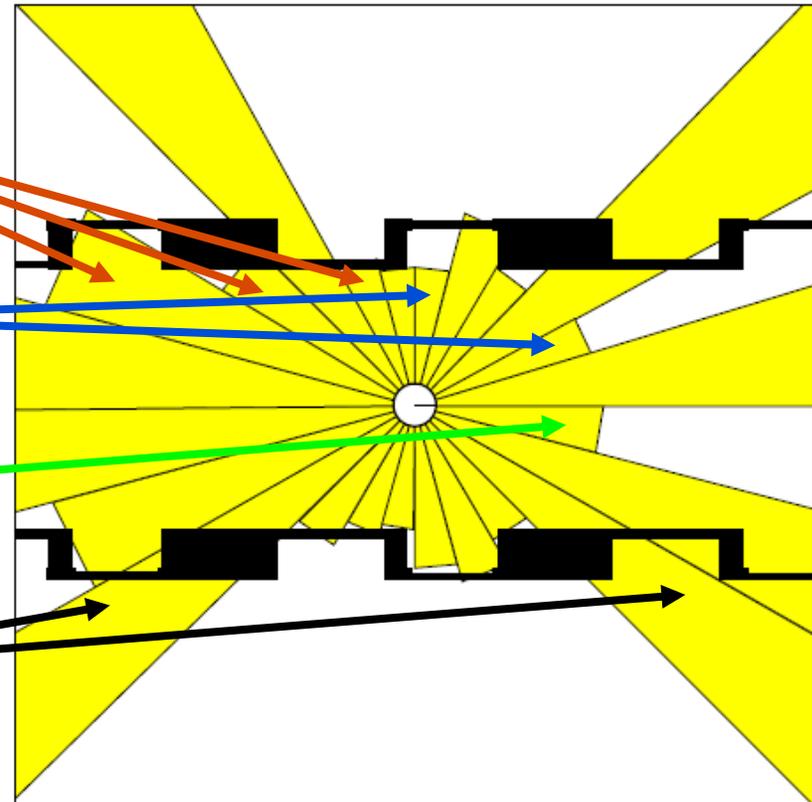


# Proximity Measurement

- Measurement can be caused by ...
  - a known obstacle.
  - cross-talk.
  - an unexpected obstacle (people, furniture, ...).
  - missing all obstacles (total reflection, glass, ...).
- Noise is due to uncertainty ...
  - in measuring distance to known obstacle.
  - in position of known obstacles.
  - in position of additional obstacles.
  - whether obstacle is missed.


# Beam-based Proximity Model

Measurement noise

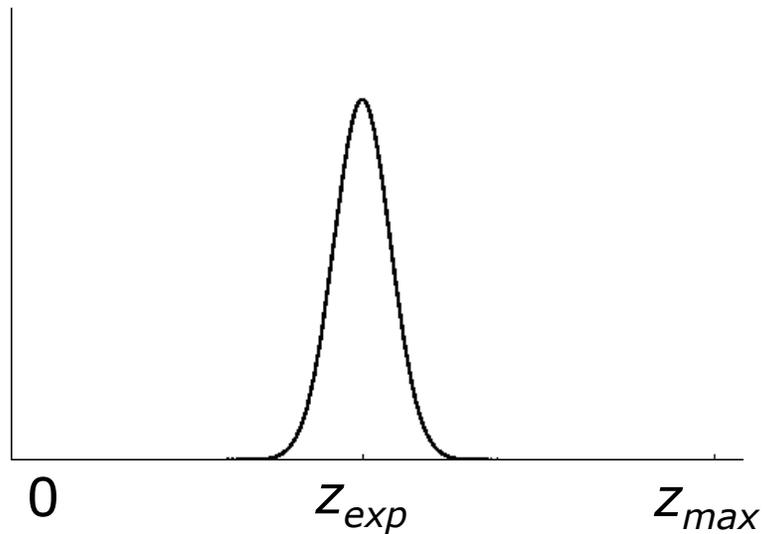

$$P_{hit}(z | x, m) = \eta \frac{1}{\sqrt{2\pi b}} e^{-\frac{1}{2} \frac{(z - z_{exp})^2}{b}}$$


Unexpected obstacles

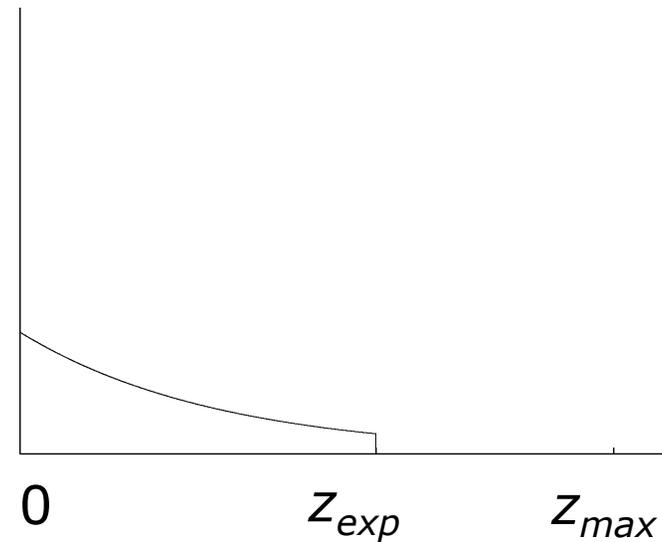

$$P_{unexp}(z | x, m) = \begin{cases} \eta \lambda e^{-\lambda z} & z < z_{exp} \\ 0 & otherwise \end{cases}$$


# Beam-based Proximity Model

Random measurement

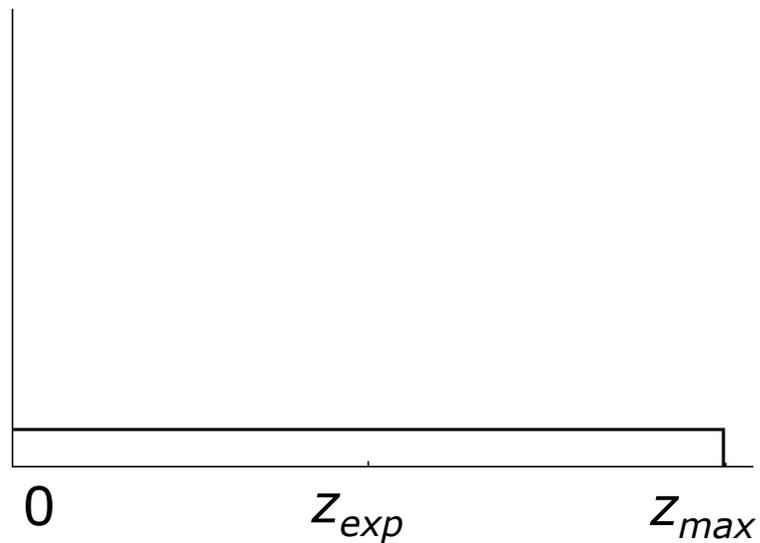


$$P_{rand}(z | x, m) = \eta \frac{1}{z_{max}}$$

Max range

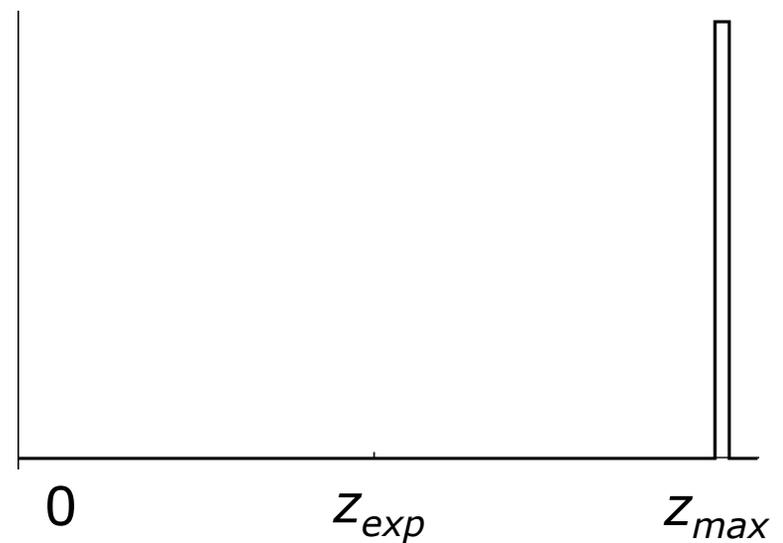

$$P_{max}(z | x, m) = \eta \frac{1}{z_{small}}$$

# Resulting Mixture Density

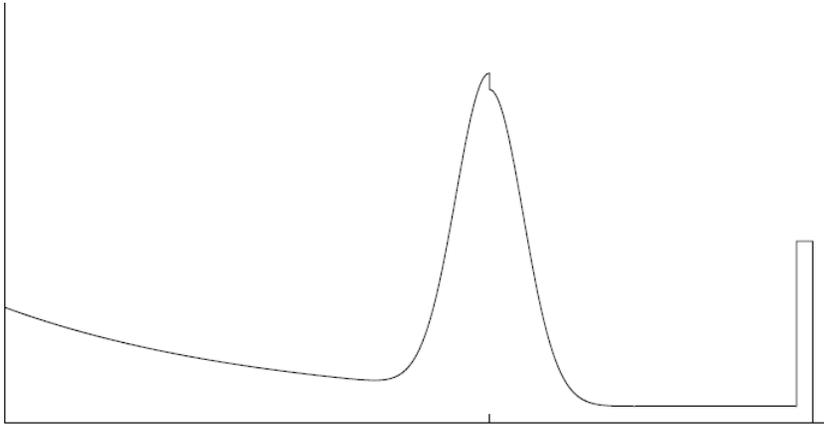


$$P(z | x, m) = \begin{pmatrix} \alpha_{\text{hit}} \\ \alpha_{\text{unexp}} \\ \alpha_{\text{max}} \\ \alpha_{\text{rand}} \end{pmatrix}^T \cdot \begin{pmatrix} P_{\text{hit}}(z | x, m) \\ P_{\text{unexp}}(z | x, m) \\ P_{\text{max}}(z | x, m) \\ P_{\text{rand}}(z | x, m) \end{pmatrix}$$


How can we determine the model parameters?

# Raw Sensor Data

Measured distances for expected distance of 300 cm.

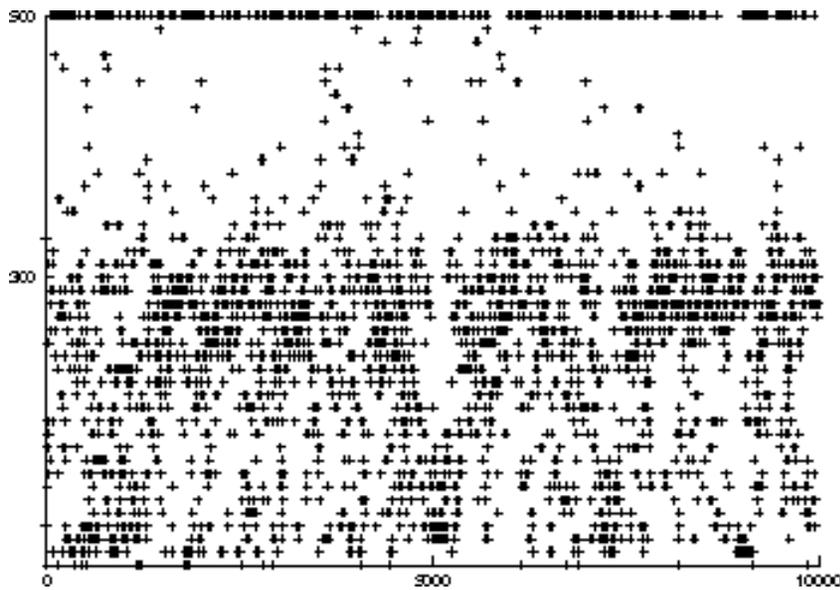

Sonar

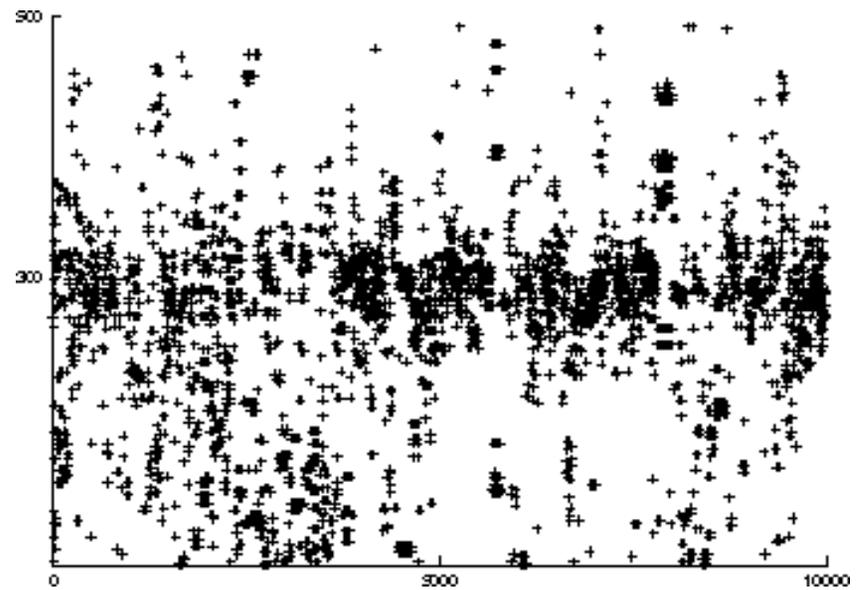

Laser


# Approximation

- Maximize log likelihood of the data



$$P(z \mid z_{\text{exp}})$$

- Search space of  $n-1$  parameters.
  - Hill climbing
  - Gradient descent
  - Genetic algorithms
  - Expectation maximization
  - ML estimate of the parameters
- Deterministically compute the  $n$ -th parameter to satisfy normalization constraint.


# Approximation Results

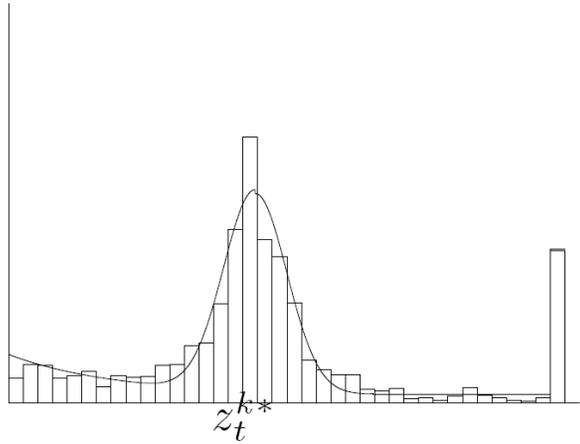

Laser

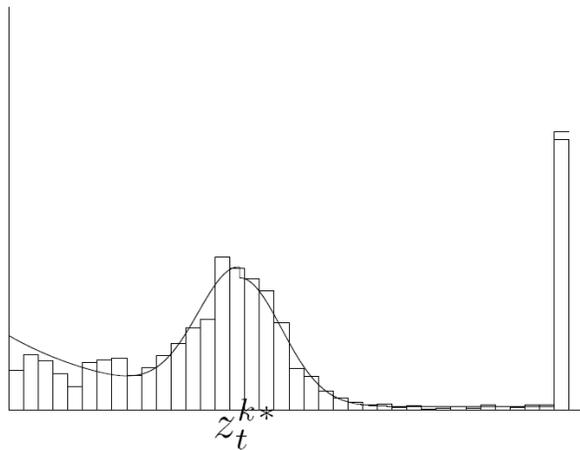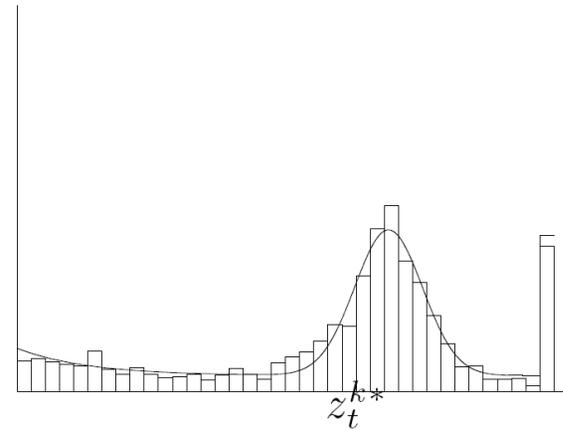


Sonar

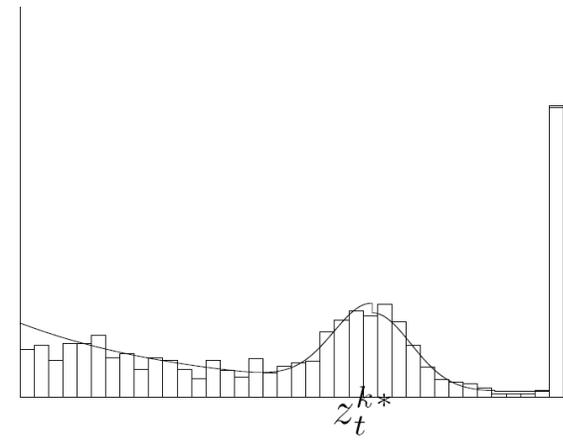


300cm

400cm

# Example

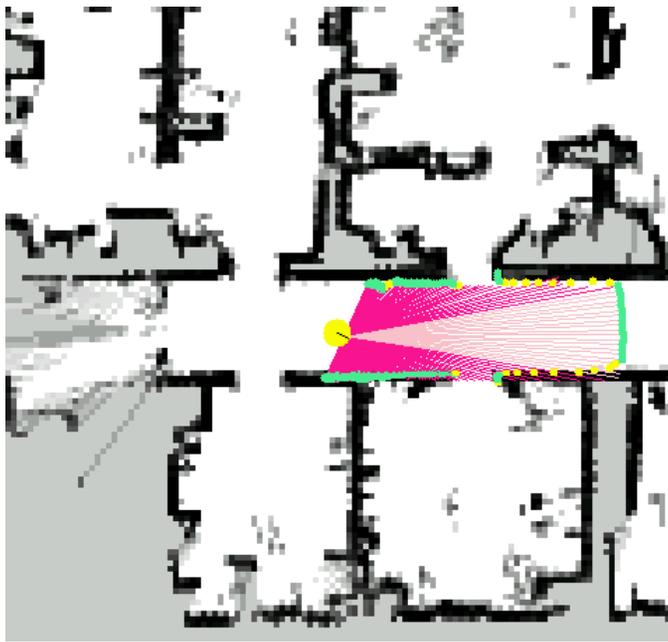

$z$

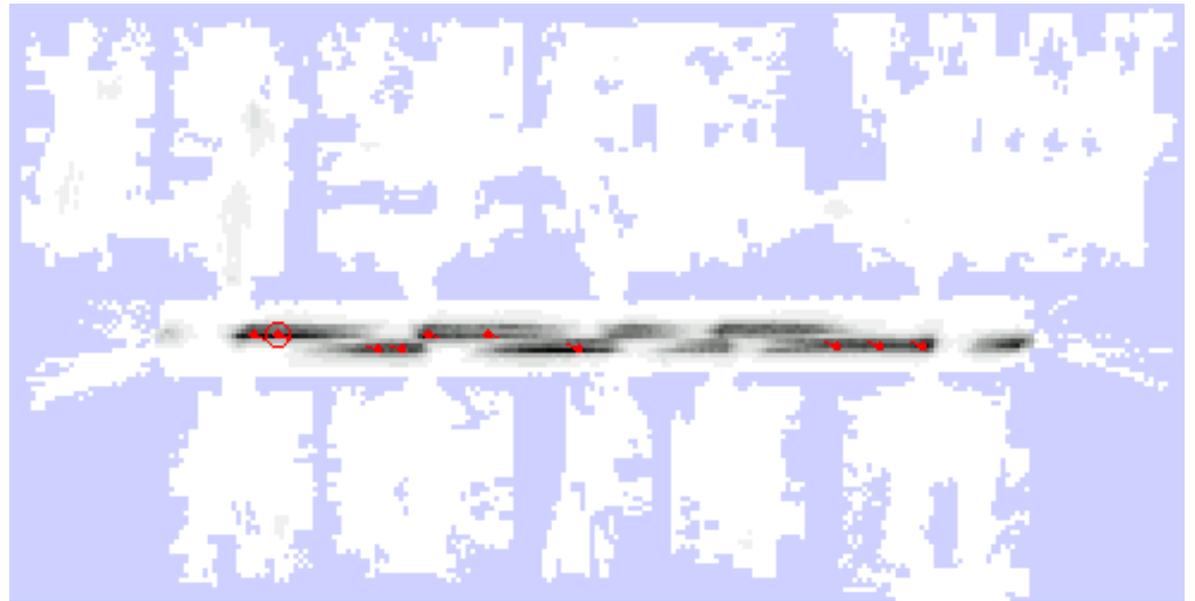


$P(z|x,m)$

Measurements along corridor are more likely  
Scan and likelihood evaluated along corridor


# Discrete Model of Proximity Sensors

- Instead of densities, consider discrete steps along the sensor beam.
- Consider dependencies between different cases.

$$P(d_i | l) = 1 - (1 - (1 - \sum_{j < i} P_u(d_j)) c_d P_m(d_i | l))) \cdot (1 - (1 - \sum_{j < i} P(d_j)) c_r)$$

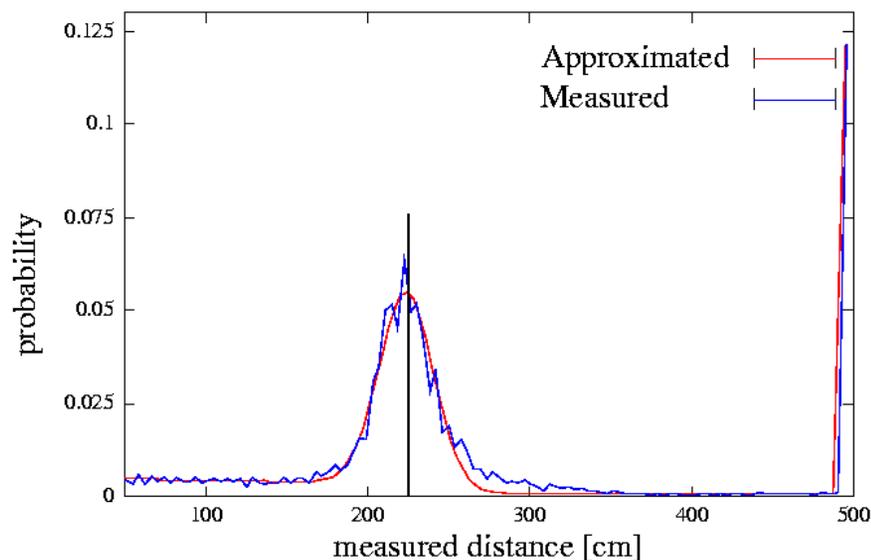


**Laser sensor**


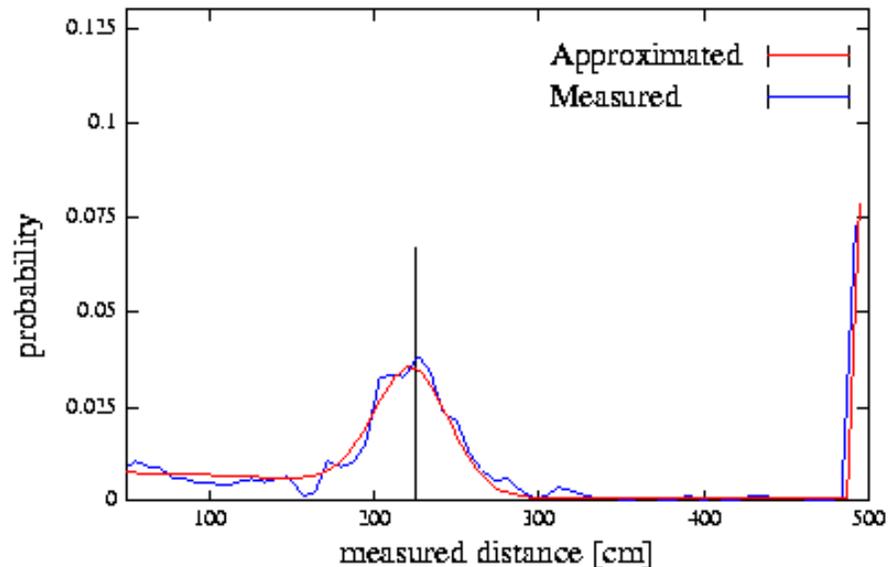


**Sonar sensor**


# Approximation Results

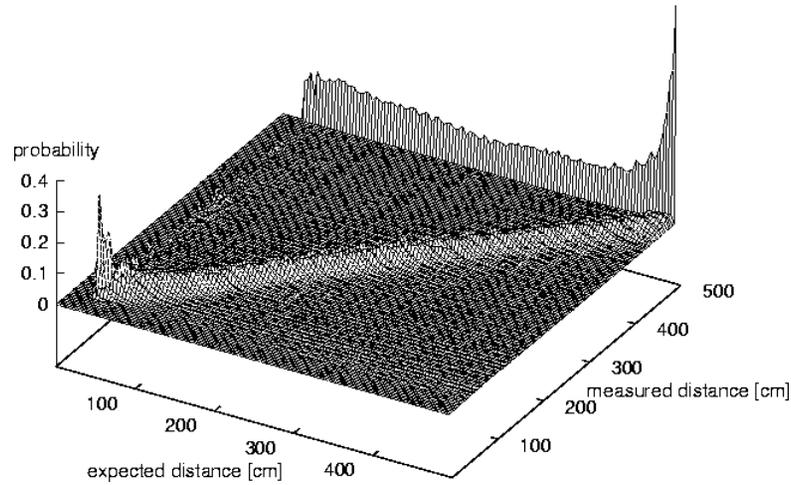


Laser

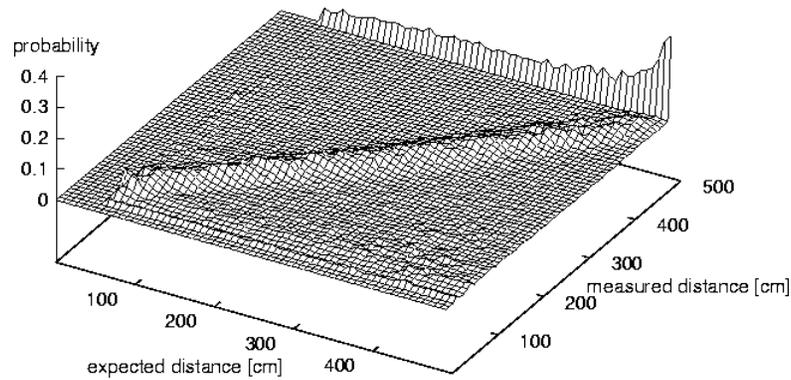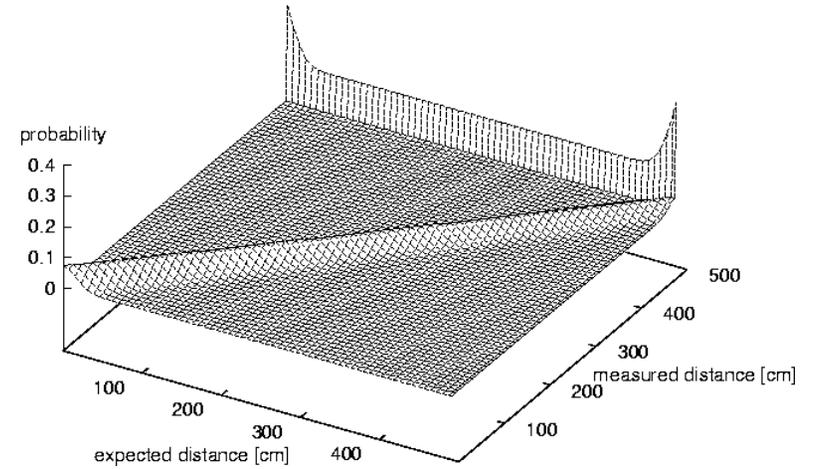


Sonar

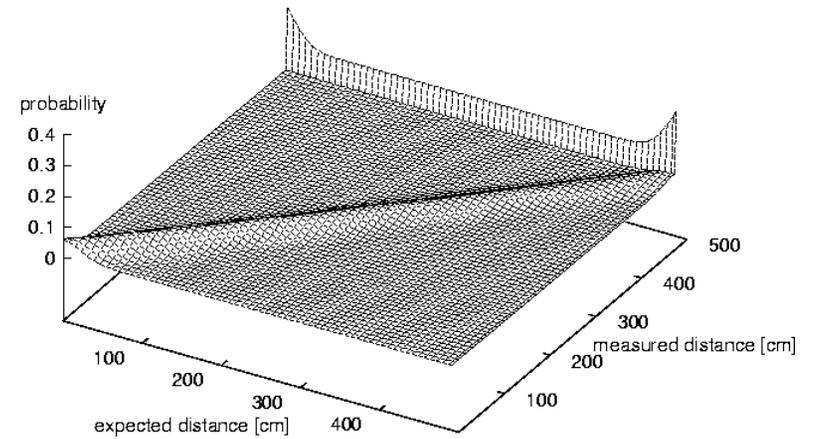


# Influence of Angle to Obstacle

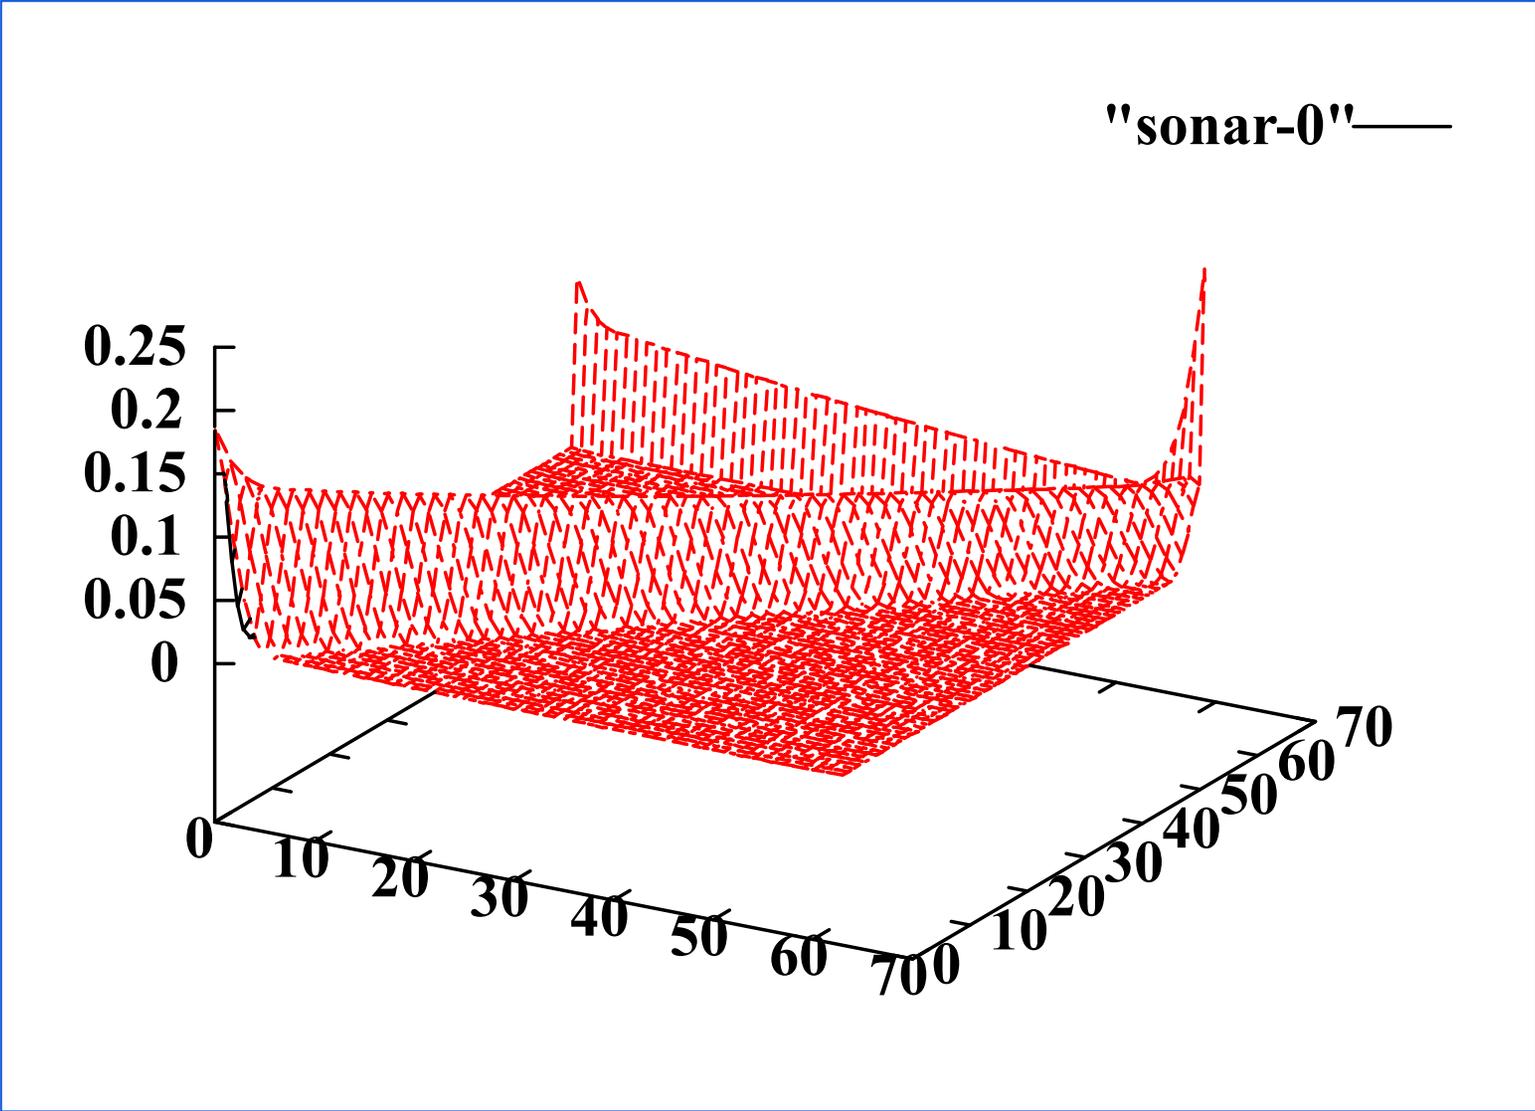


# Influence of Angle to Obstacle

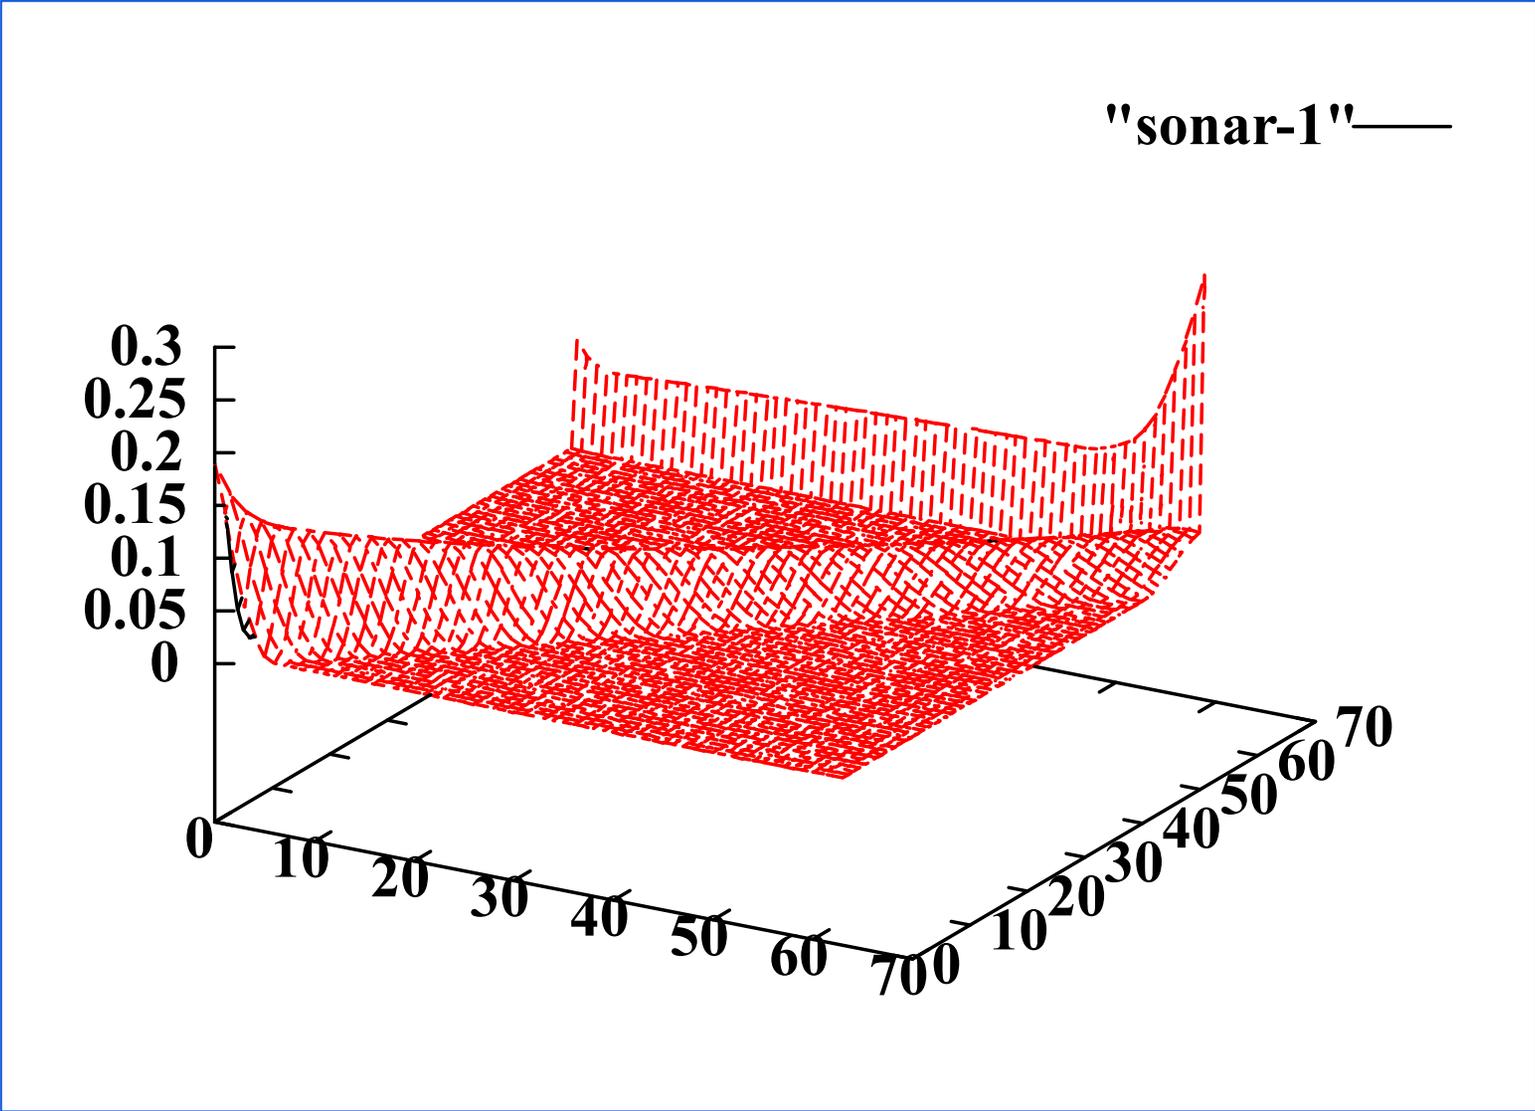

# Influence of Angle to Obstacle

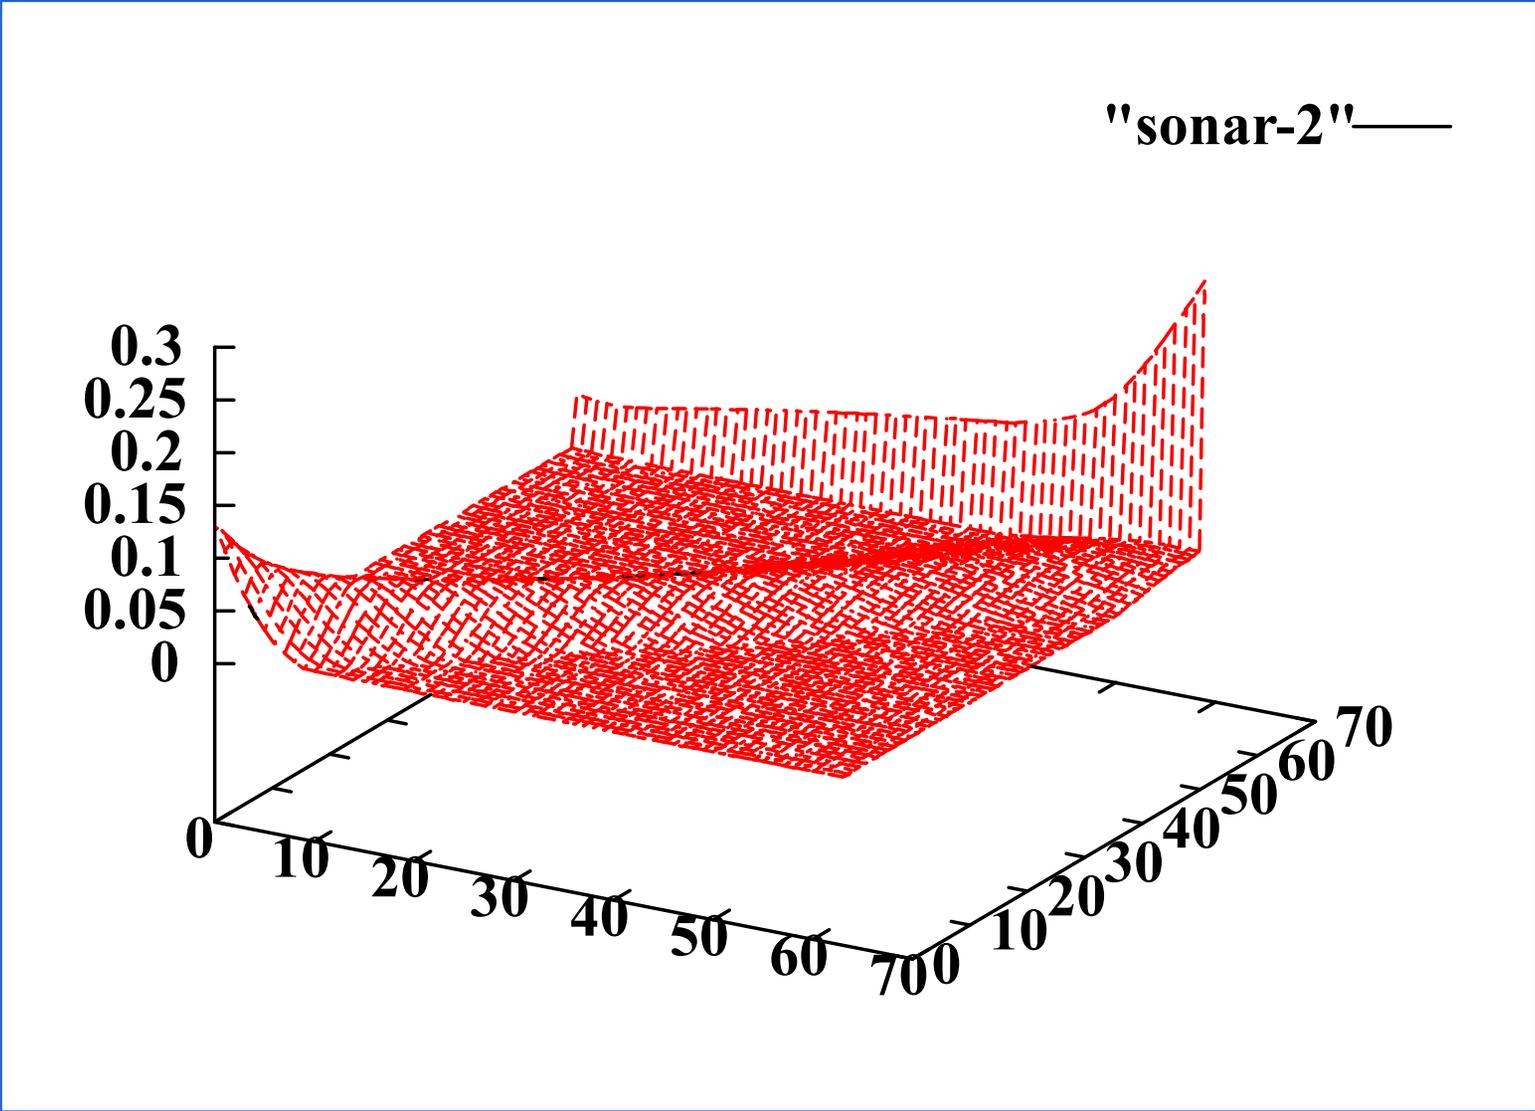

# Influence of Angle to Obstacle

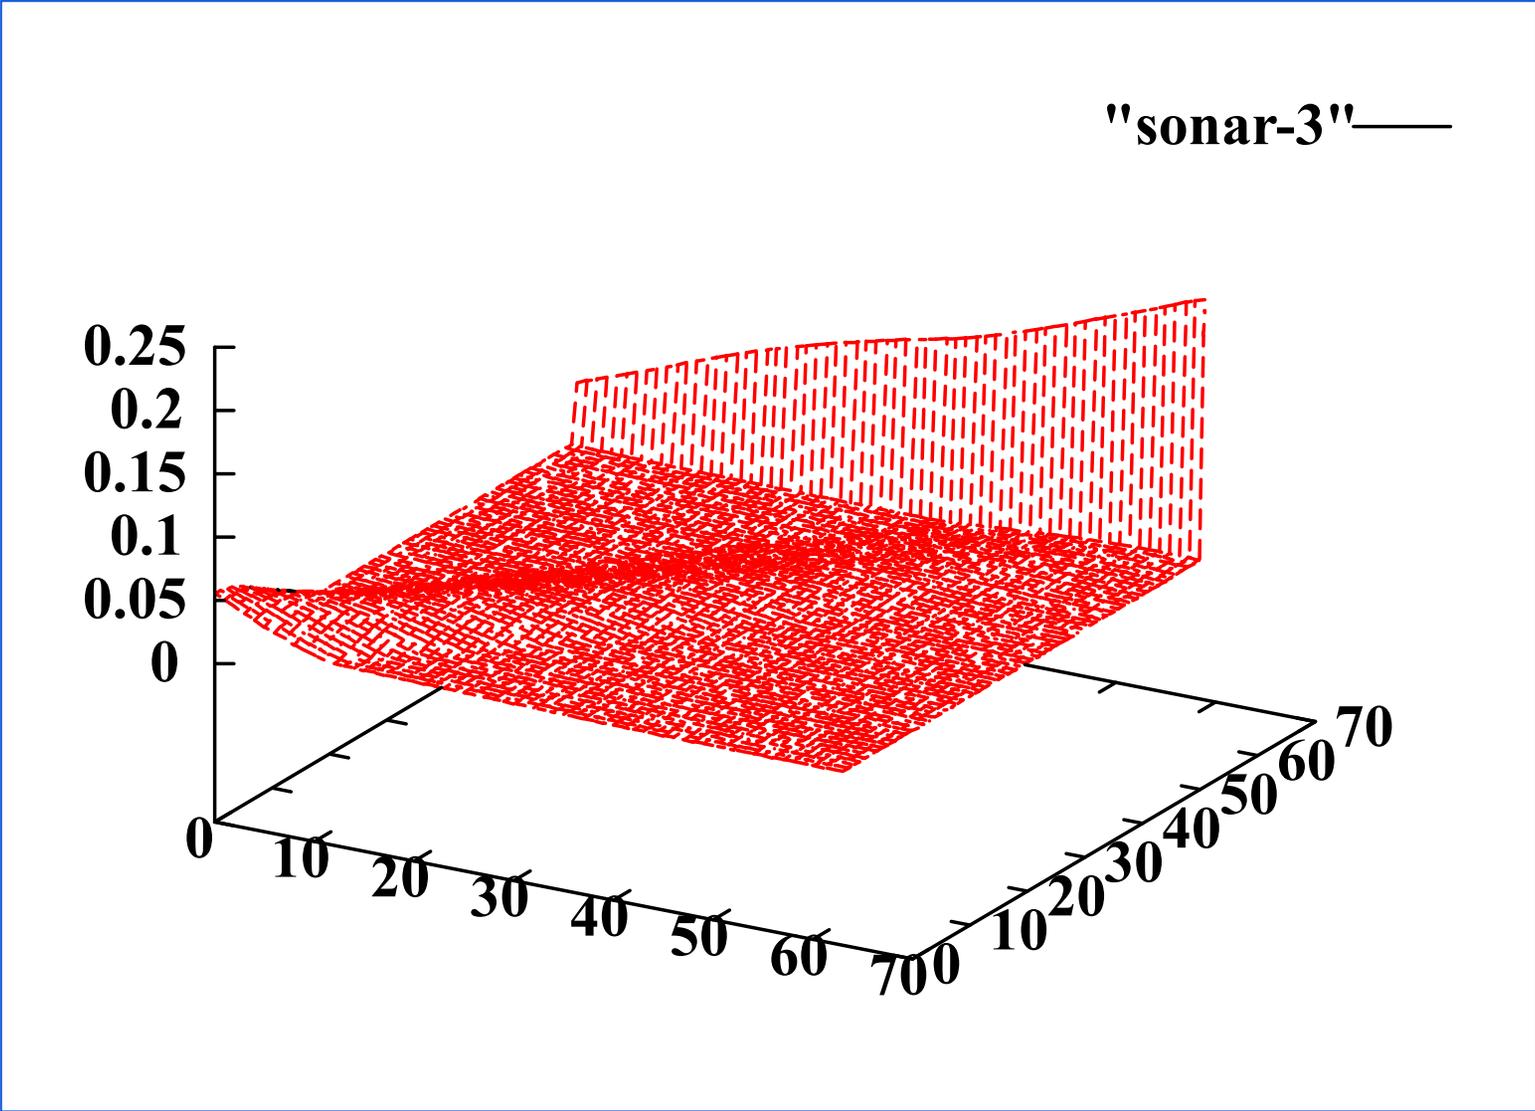

# Summary Beam-based Model

- Assumes independence between beams.
  - Justification?
  - Overconfident!
- Models physical causes for measurements.
  - Mixture of densities for these causes.
  - Assumes independence between causes. Problem?
- Implementation
  - Learn parameters based on real data.
  - Different models should be learned for different angles at which the sensor beam hits the obstacle.
  - Determine expected distances by ray-tracing.
  - Expected distances can be pre-processed.

# Scan-based Model


- Beam-based model is ...
  - not smooth for small obstacles and at edges.
  - not very efficient.
  - Small change in pose – large change in likelihood

- **Idea:** Instead of following along the beam, just check the end point.


# Scan-based Model

- Probability is a mixture of ...
  - a Gaussian distribution with mean at **distance to closest obstacle**,
  - a uniform distribution for random measurements, and
  - a small uniform distribution for max range measurements.
- Again, independence between different components is assumed.

# Example

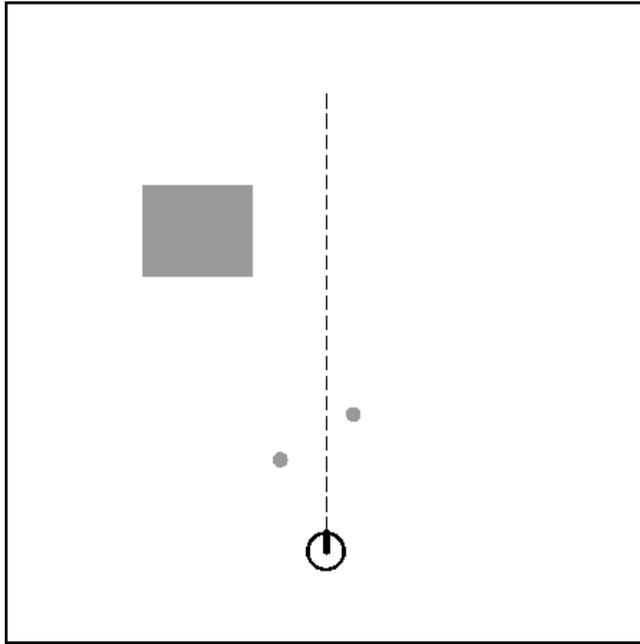


Map  $m$

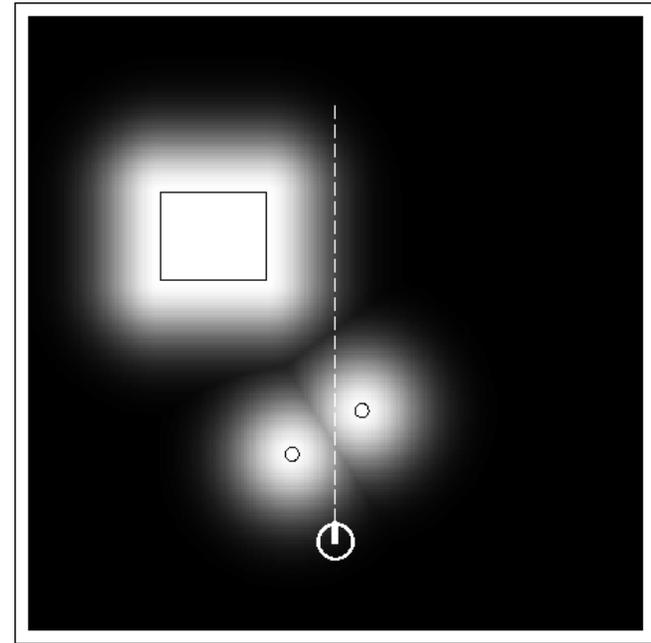

Likelihood field


$$P(z|x,m)$$

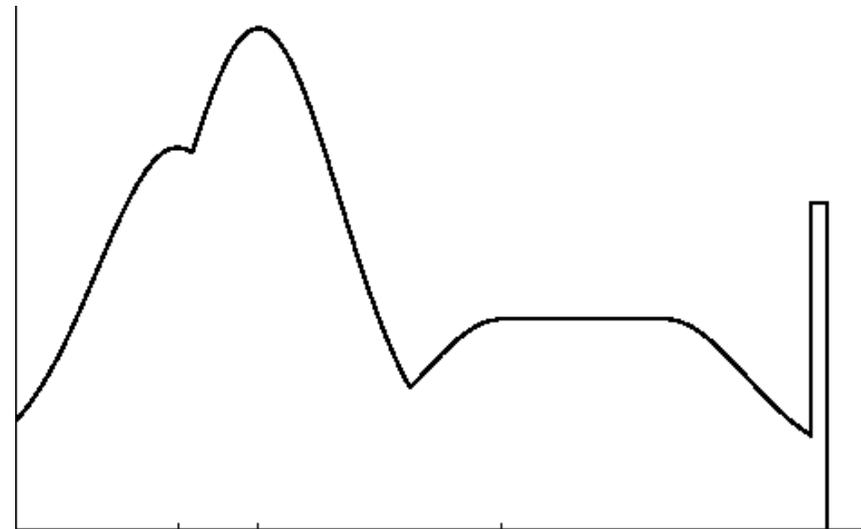

# San Jose Tech Museum




Occupancy grid map

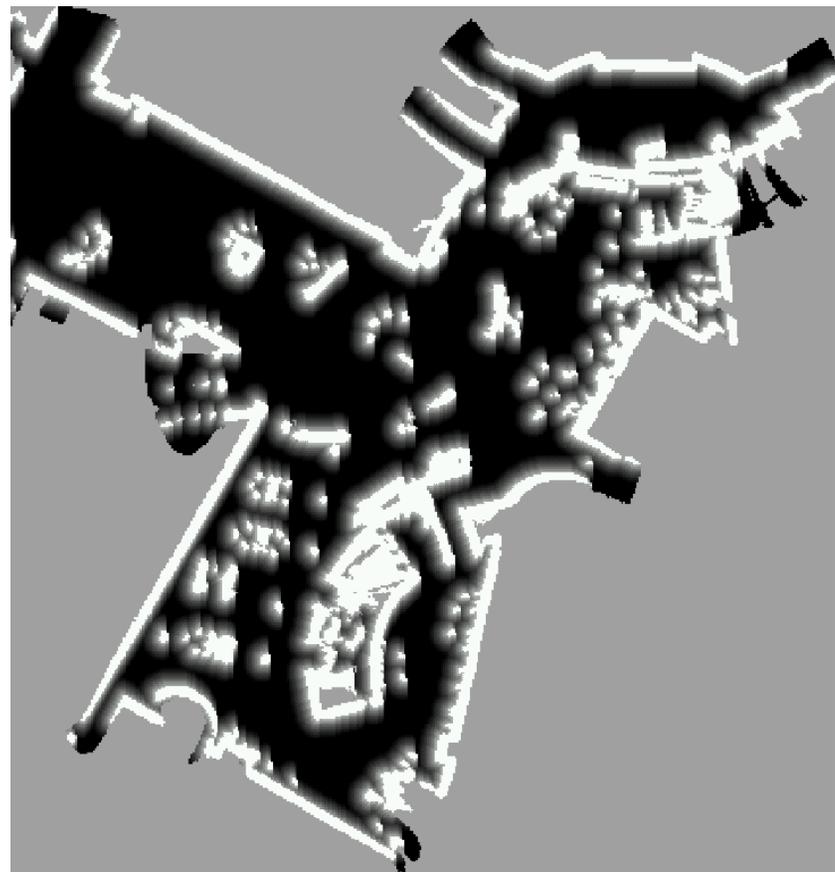

Likelihood field


# Scan Matching

- Extract likelihood field from scan and use it to match different scan.

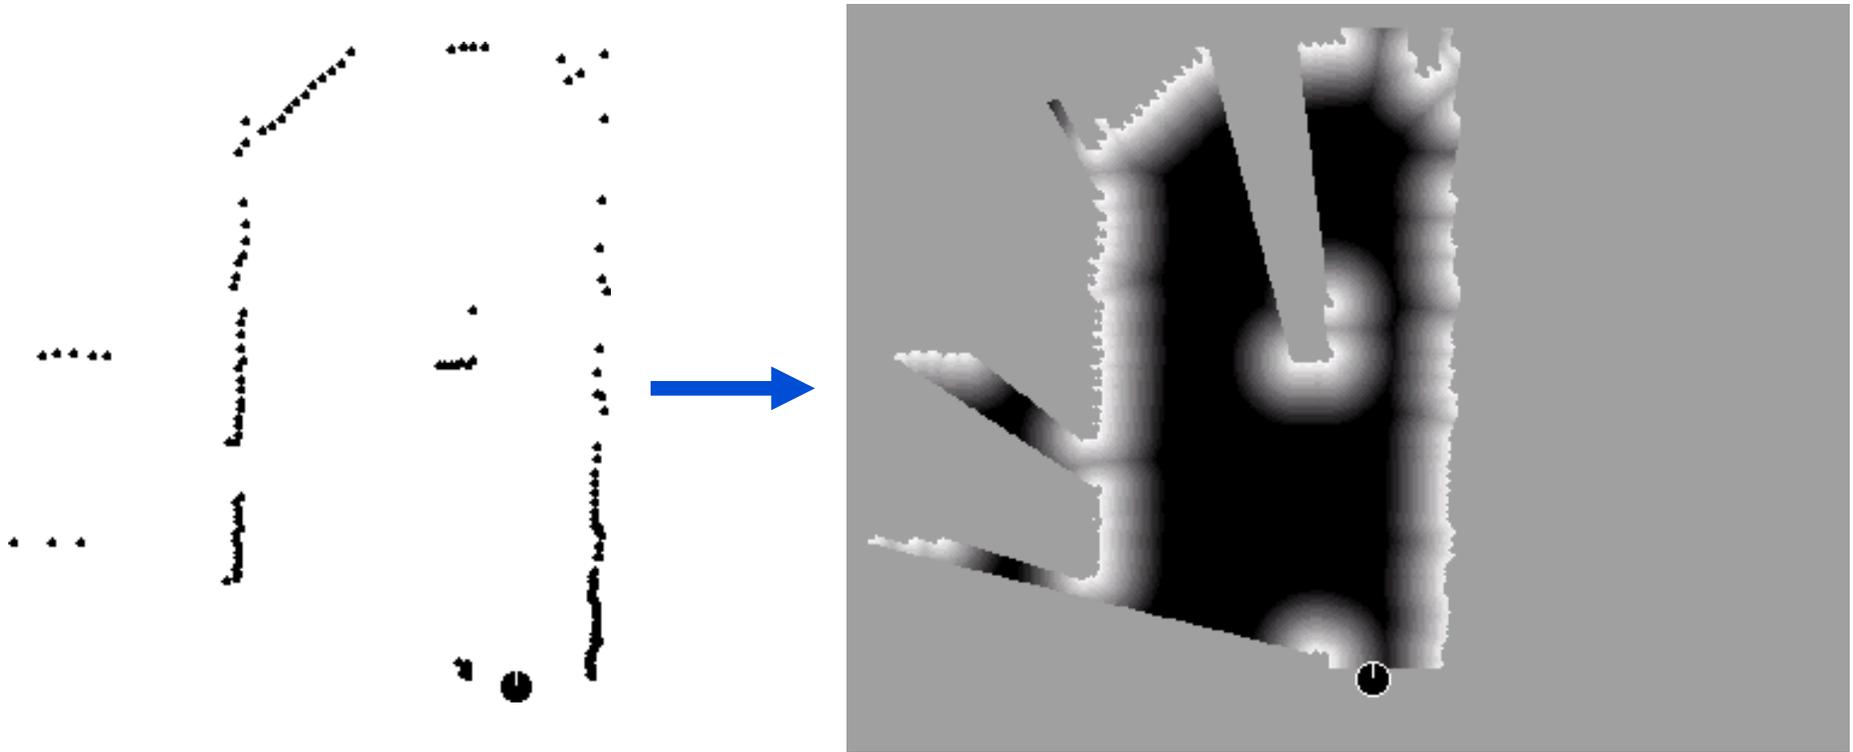

# Scan Matching

- Extract likelihood field from first scan and use it to match second scan.



~0.01 sec

# Properties of Scan-based Model

- Highly efficient, uses 2D tables only.
- Smooth w.r.t. to small changes in robot position.
- Allows gradient descent, scan matching.
- Ignores physical properties of beams.
- Will it work for ultrasound sensors?

## Additional Models of Proximity Sensors

- **Map matching (sonar, laser)**: generate small, local maps from sensor data and match local maps against global model.
- **Scan matching (laser)**: map is represented by scan endpoints, match scan into this map.
- **Features (sonar, laser, vision)**: Extract features such as doors, hallways from sensor data.

# Landmarks

- Active beacons (*e.g.*, radio, GPS)
- Passive (*e.g.*, visual, retro-reflective)
- Standard approach is **triangulation**
  
- Sensor provides
  - distance, or
  - bearing, or
  - distance and bearing.

# Distance and Bearing








# Probabilistic Model

1. Algorithm **landmark\_detection\_model**( $z, x, m$ ):  
 $z = \langle i, d, \alpha \rangle, x = \langle x, y, \theta \rangle$
2.  $\hat{d} = \sqrt{(m_x(i) - x)^2 + (m_y(i) - y)^2}$
3.  $\hat{\alpha} = \text{atan2}(m_y(i) - y, m_x(i) - x) - \theta$
4.  $p_{\text{det}} = \text{prob}(\hat{d} - d, \varepsilon_d) \cdot \text{prob}(\hat{\alpha} - \alpha, \varepsilon_\alpha)$
5. Return  $z_{\text{det}} P_{\text{det}} + z_{\text{fp}} P_{\text{uniform}}(z \mid x, m)$


Computing likelihood of landmark measurement

# Distributions

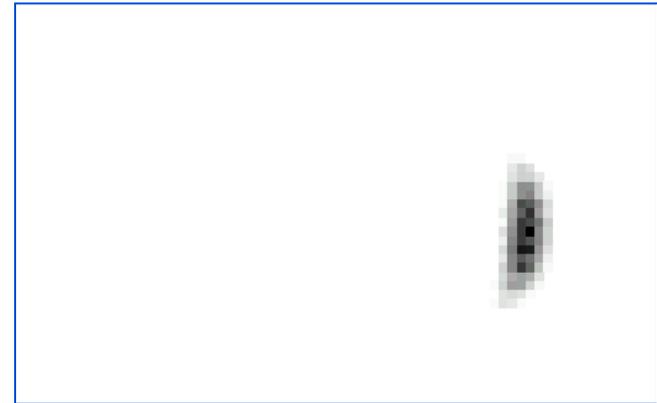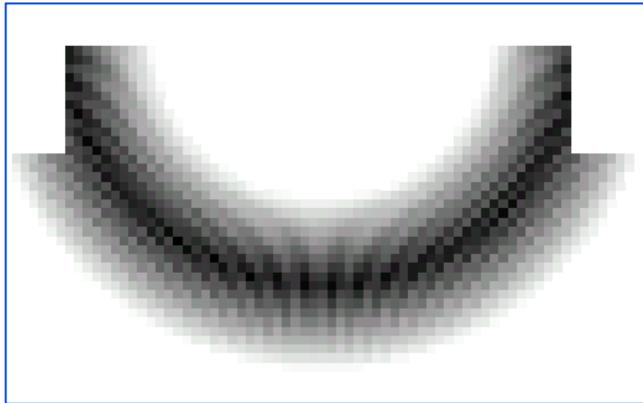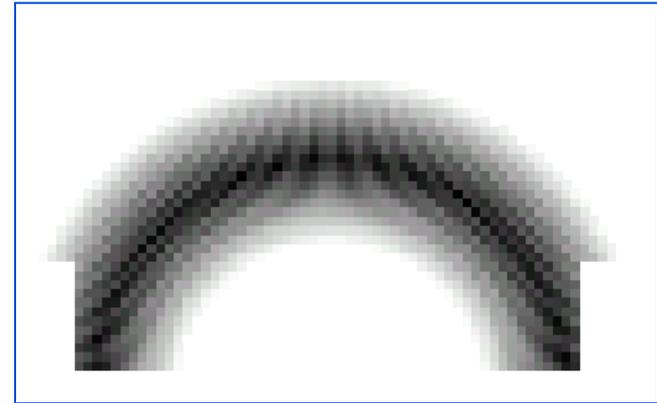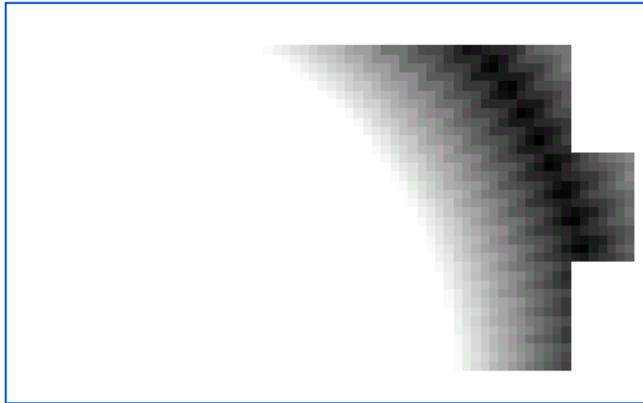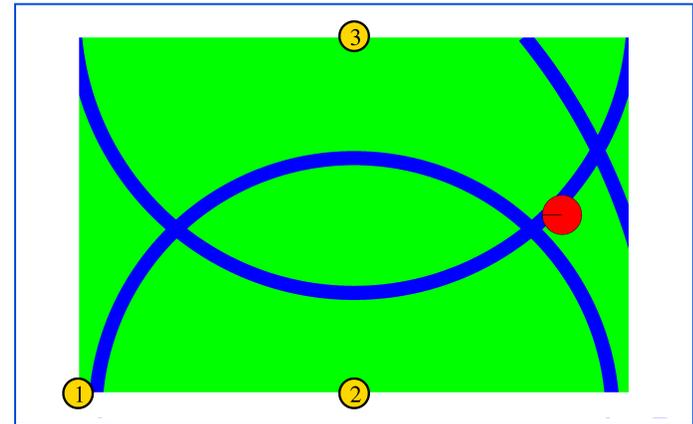

# Distances Only No Uncertainty


$$x = (a^2 + d_1^2 - d_2^2) / 2a$$
$$y = \pm \sqrt{(d_1^2 - x^2)}$$

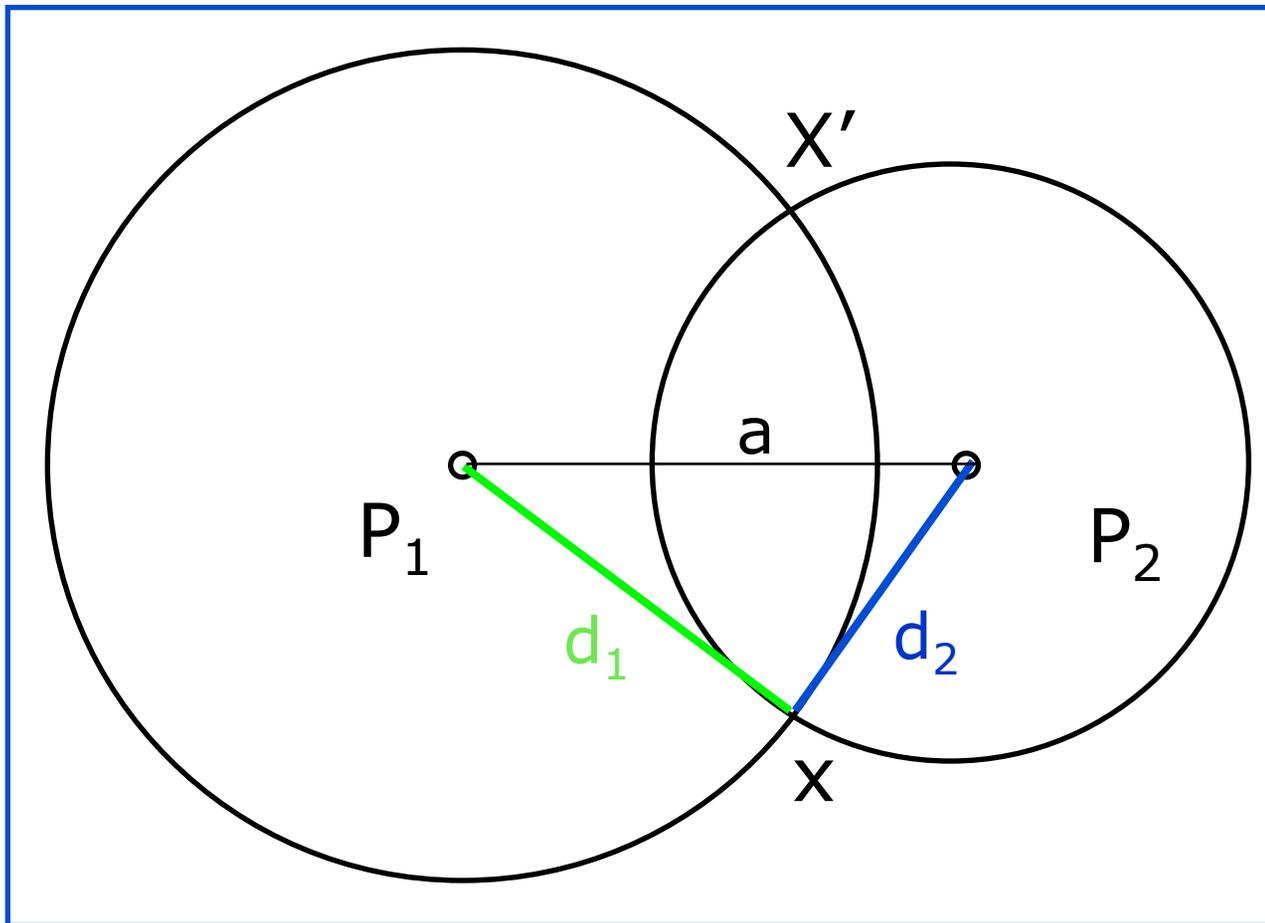

$$P_1 = (0, 0)$$


$$P_2 = (a, 0)$$

# Bearings Only No Uncertainty

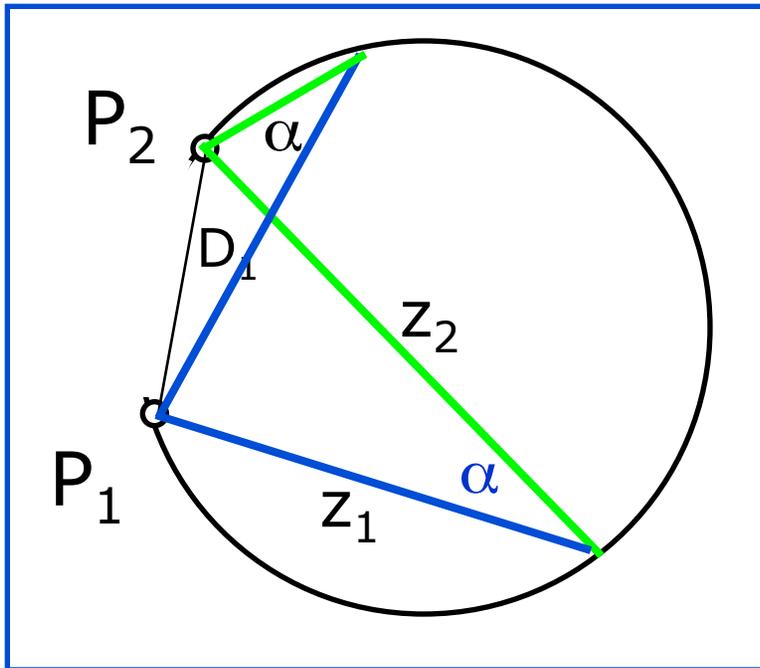

Law of cosine

$$D_1^2 = z_1^2 + z_2^2 - 2 z_1 z_2 \cos \alpha$$


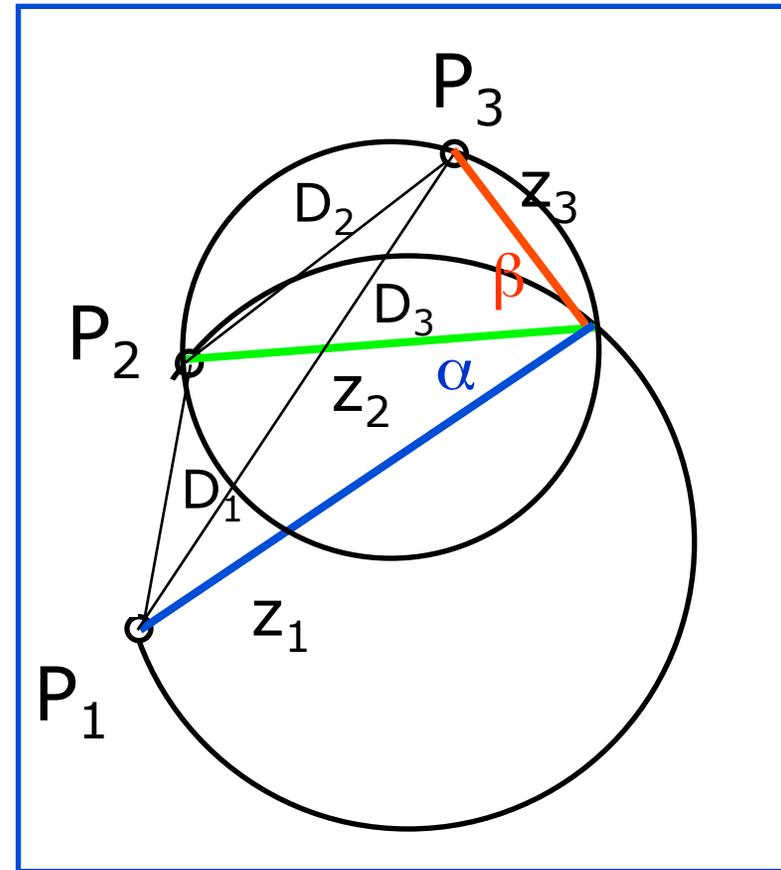


$$D_1^2 = z_1^2 + z_2^2 - 2 z_1 z_2 \cos(\alpha)$$

$$D_2^2 = z_2^2 + z_3^2 - 2 z_2 z_3 \cos(\beta)$$

$$D_3^2 = z_1^2 + z_3^2 - 2 z_1 z_3 \cos(\alpha + \beta)$$

# Bearings Only With Uncertainty

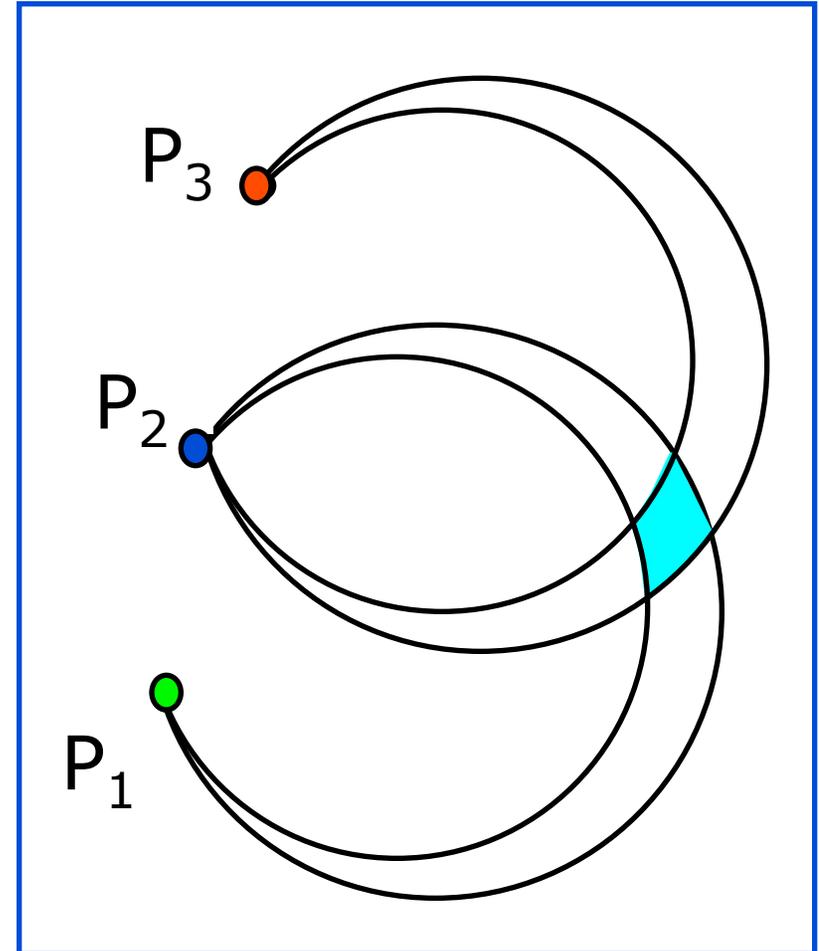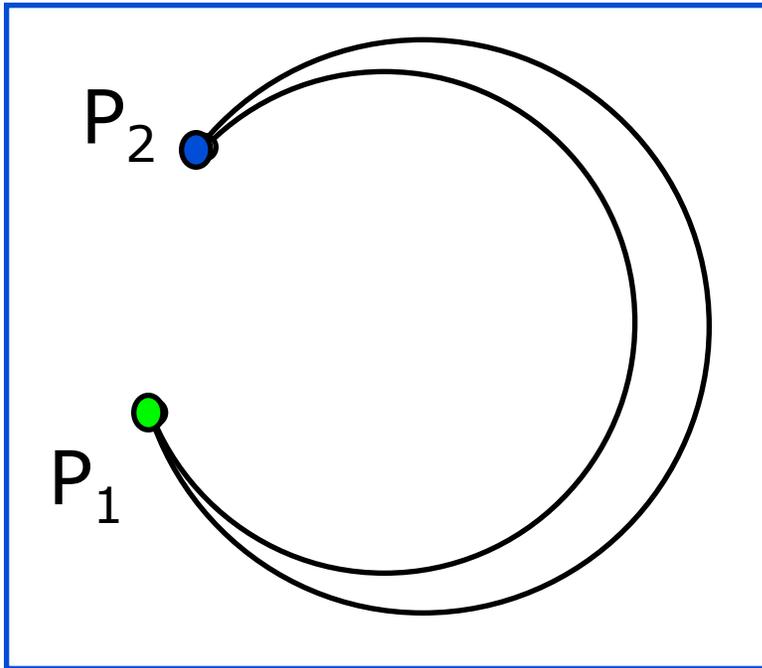

Most approaches attempt to find estimation mean.

# Summary of Sensor Models

- Explicitly modeling uncertainty in sensing is key to robustness.
- In many cases, good models can be found by the following approach:
  1. Determine parametric model of noise free measurement.
  2. Analyze sources of noise.
  3. Add adequate noise to parameters (eventually mix in densities for noise).
  4. Learn (and verify) parameters by fitting model to data.
  5. Likelihood of measurement is given by “probabilistically comparing” the actual with the expected measurement.
- This holds for motion models as well.
- It is extremely important to be aware of the underlying assumptions!