

Putting testing first (Test driven development)


Brittany Johnson
SWE 437

Adapted from slides by Paul Ammann & Jeff Offutt

The increased emphasis on testing

Philosophy of **traditional** software development methods

- **Upfront** analysis
- Extensive **modeling**
- Reveal **problems** as early as possible

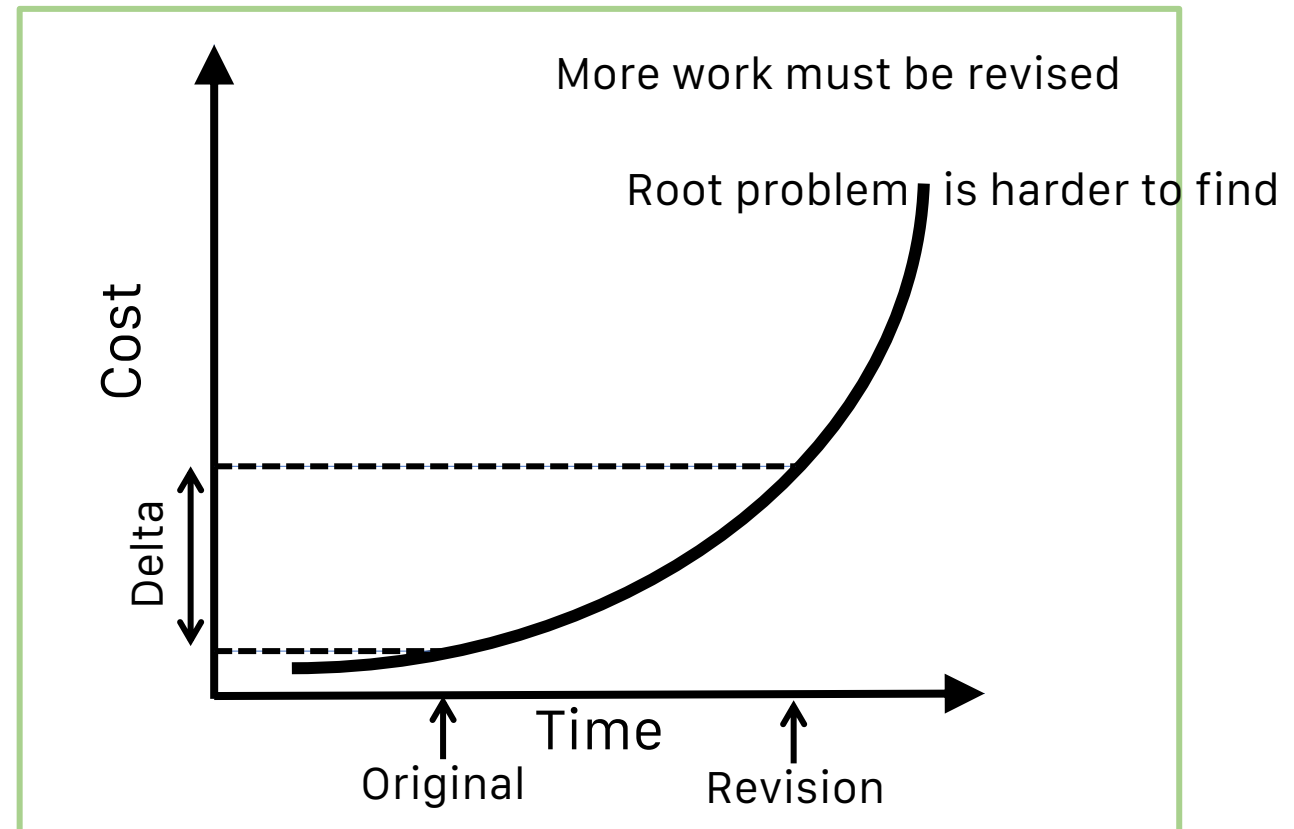

Traditional assumptions

- 1. Modeling and analysis can identify potential problems early in development**
- 2. Savings implied by the cost-of-change curve justify the cost of modeling and analysis over the life of the project**

These are true if requirements are always complete and current

But customers always change their minds!

- Humans are naturally good at approximating
- But pretty bad at perfecting

These two assumptions have made software engineering frustrating and difficult for decades

Thus, agile methods...

Why be agile?

Agile methods start by recognizing that **neither assumption** is valid for many current software projects

- Software engineers are **not good at developing requirements**
- We do not anticipate many **changes**
- Many of the changes we do anticipate are **not needed**

Requirements (and other "non-executable artifacts") tend to go **out of date** very quickly

- We seldom take time to **update** them
- Many current software projects **change continuously**

Agile methods expect software to **start small and evolve** over time


- Embraces **software evolution** instead of fighting it



Supporting evolutionary design

Traditional design advice says to anticipate changes

Designers often anticipate changes that don't happen

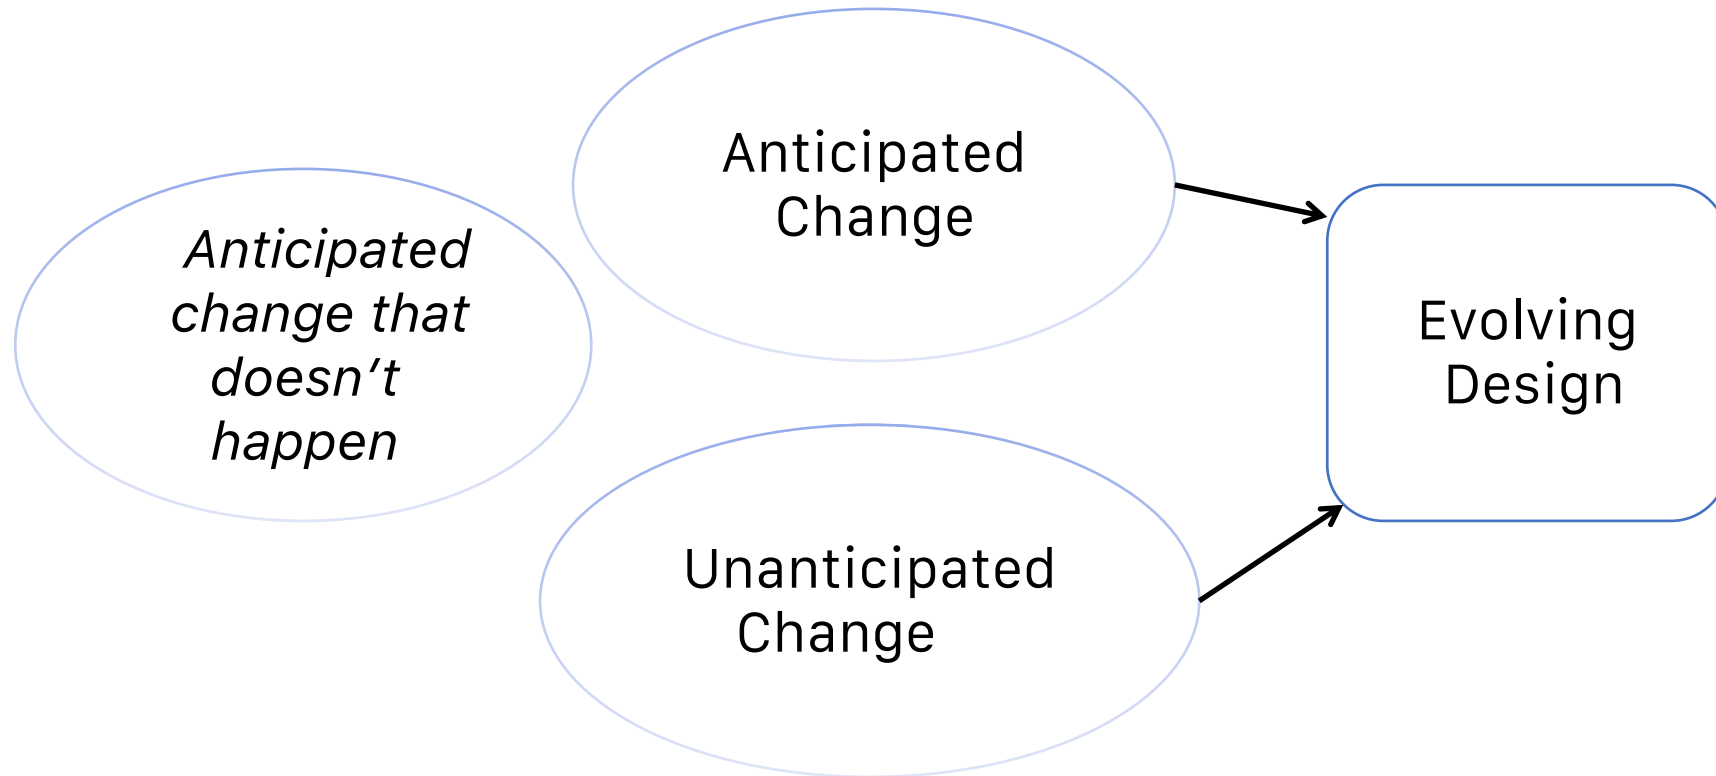


Both anticipated and unanticipated changes affect design

The test harness as guardian (4.2)

What is correctness?

Traditional Correctness
(Universal)

$$\forall x, y, x \geq y$$

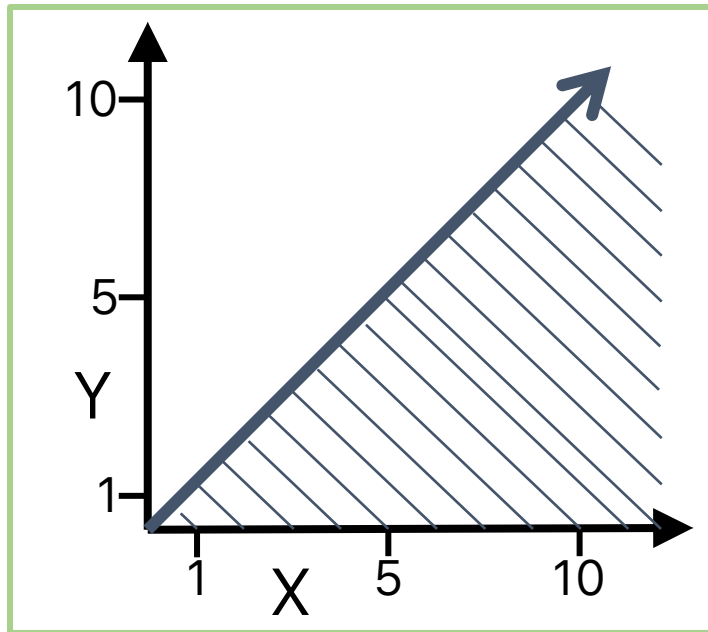

Agile Correctness
(Existential)

{ (1, 1) → T
(1, 0) → T
(0, 1) → F
(10, 5) → T
(10, 12) → F }

Supporting evolutionary design

In **traditional** methods, we try to define **all correct behavior** completely, at the beginning

- What is **correctness**?
- Does "correctness" **mean anything** in large engineering products?
- People are **VERY BAD** at completely defining correctness

In **agile** methods, we redefine correctness to be **relative** to a specific set of tests

- If the software behaves correctly **on the tests**, it is "correct"
- Instead of **defining all** behaviors, we **demonstrate some** behaviors
- **Mathematicians** may be disappointed at lack of completeness

But software engineers ain't mathematicians!

In-class exercise

Discuss

limited correctness



Do you understand the distinction?

How does limited correctness related to evolutionary design?

Test harnesses verify correctness

A **test harness** runs all automated tests and reports results to the developer

Tests must be **automated**

- Test automation is a **prerequisite** to test driven development

Every test must include a **test oracle** that can evaluate whether that test executed correctly

The tests replace the **requirements**

Tests must be **high quality** and must **run quickly**

We run tests **every time** we make a change to the software



Continuous integration

Agile methods work best when the current version of the software can be run against all tests at any time

A **continuous integration server** rebuilds the system, returns, and re-verifies tests whenever *any* update is checked into the repository

Mistakes are caught earlier

Other developers are aware of changes early

The rebuild and reverify must happen as soon as possible

- Thus, tests need to execute quickly

A **continuous integration server** doesn't just run tests, it decides if a modified system is **still correct**



Jenkins




Travis CI



Continuous integration reduces risk

TDD encourages incremental integration of functionality

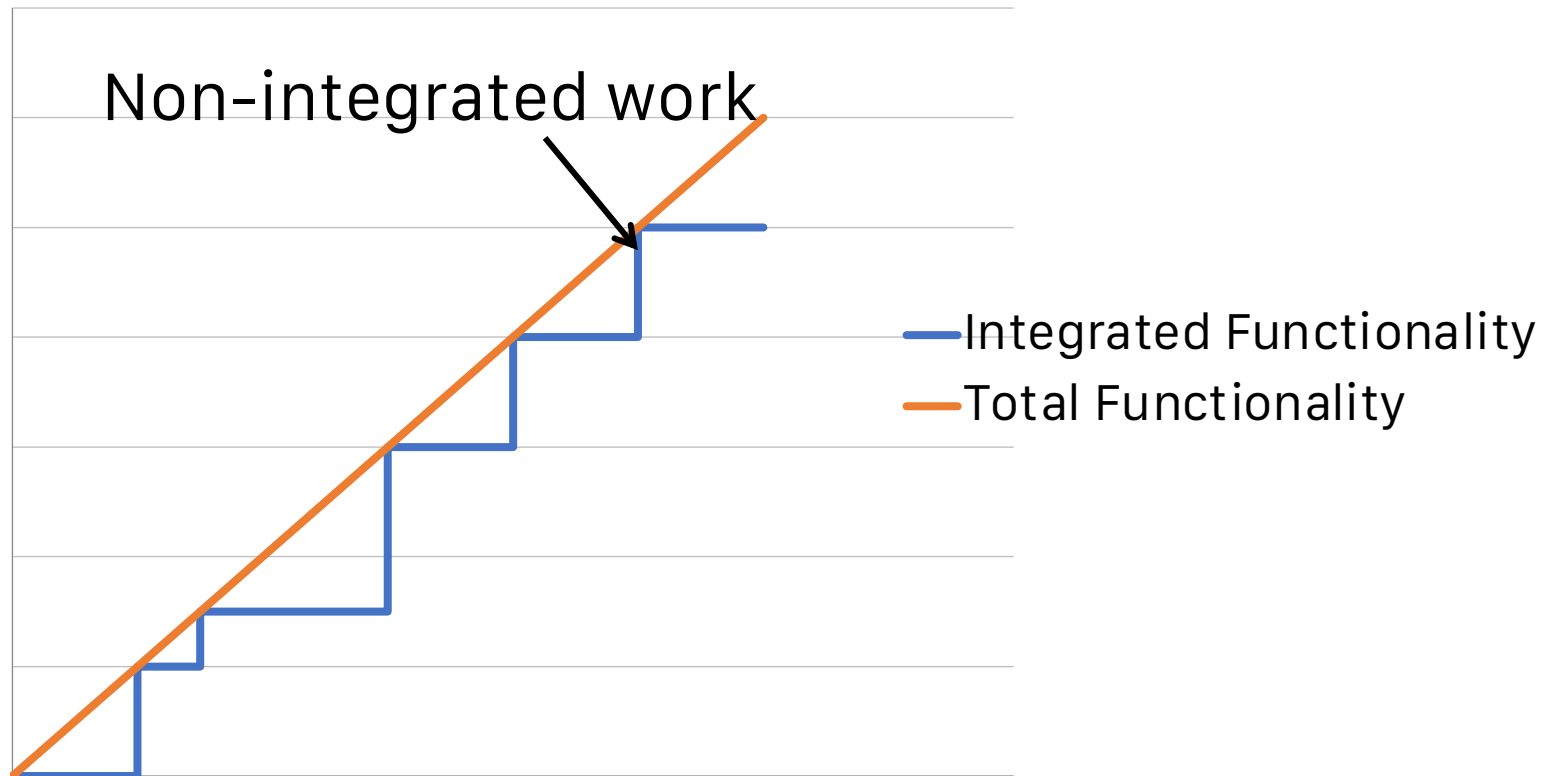

Non-integrated functionality is dangerous


Build it right: TDD

Test-Code-Refactor: the heart-beat

- The rule: **only write code to fix a failing test**
- Traditional development cycle



- Test-driven development cycle

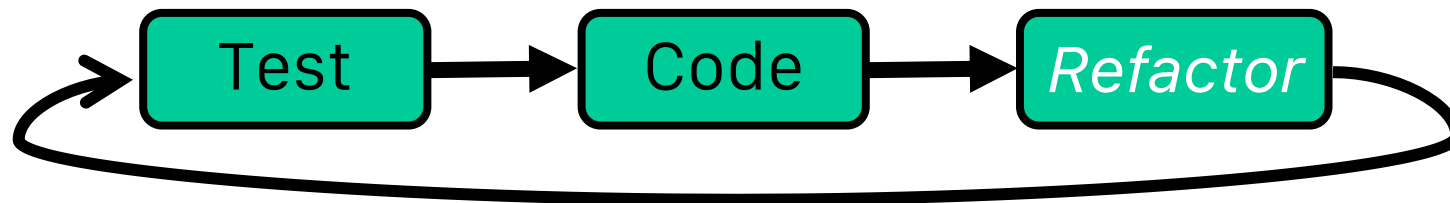

Sometimes called red-green-refactor

Build it right: TDD

First, we write a test

This really amounts to design by example

- We make decisions about how the **Application Programmer Interface (API)** works
 - Class name, method names, return results, etc.
 - This is essentially the user interface
- We're thinking hard about how code is used
- We're taking a client perspective
- We're working at a very small scale

Example for a stack

```
stack = ... ;  
stack.push (x);  
y = stack.pop();  
assertEquals (x, y);
```

Start with one concrete client interaction

In-class exercise

You are asked to write a program to merge two lists

Design the FIRST test case (test values and expected output)

Do NOT consider software design, or details of the behavior that are not needed for the first test

Build it right: TDD

Then we write **just enough** code

- We don't write more code
- All we want is to make the test pass
 - It should be a very small step
 - Implementation probably not optimal
 - We don't care (yet)



Goal: Make code base (just) pass test suite

Build it right: TDD

And then we refactor

TDD without refactoring just makes ugly code

- Maintenance debt

We have numerous transformations to address this

Developing with small steps

- The code always runs!
 - Changes are small enough to fit in our heads
 - Time-frame is minutes to (maybe) hours
- Evolutionary design
 - Anticipated vs unanticipated changes
 - Many "anticipated changes" turn out to be unnecessary



New ways to apply standard lessons

Build it right: TDD

Keeping code healthy with refactoring


Refactoring: A disciplined technique for restructuring an existing body of code, and altering its internal structure without changing its external behavior

- Refactoring is disciplined
 - Wait for a problem before solving it
- Refactorings are transformations
 - Many refactorings are simply applications of patterns
- Refactorings alter internal structure
- Refactorings preserve behavior

Focus is on current code, not future code

User stories

A **user story** is a few sentences that capture what a user will do with the software

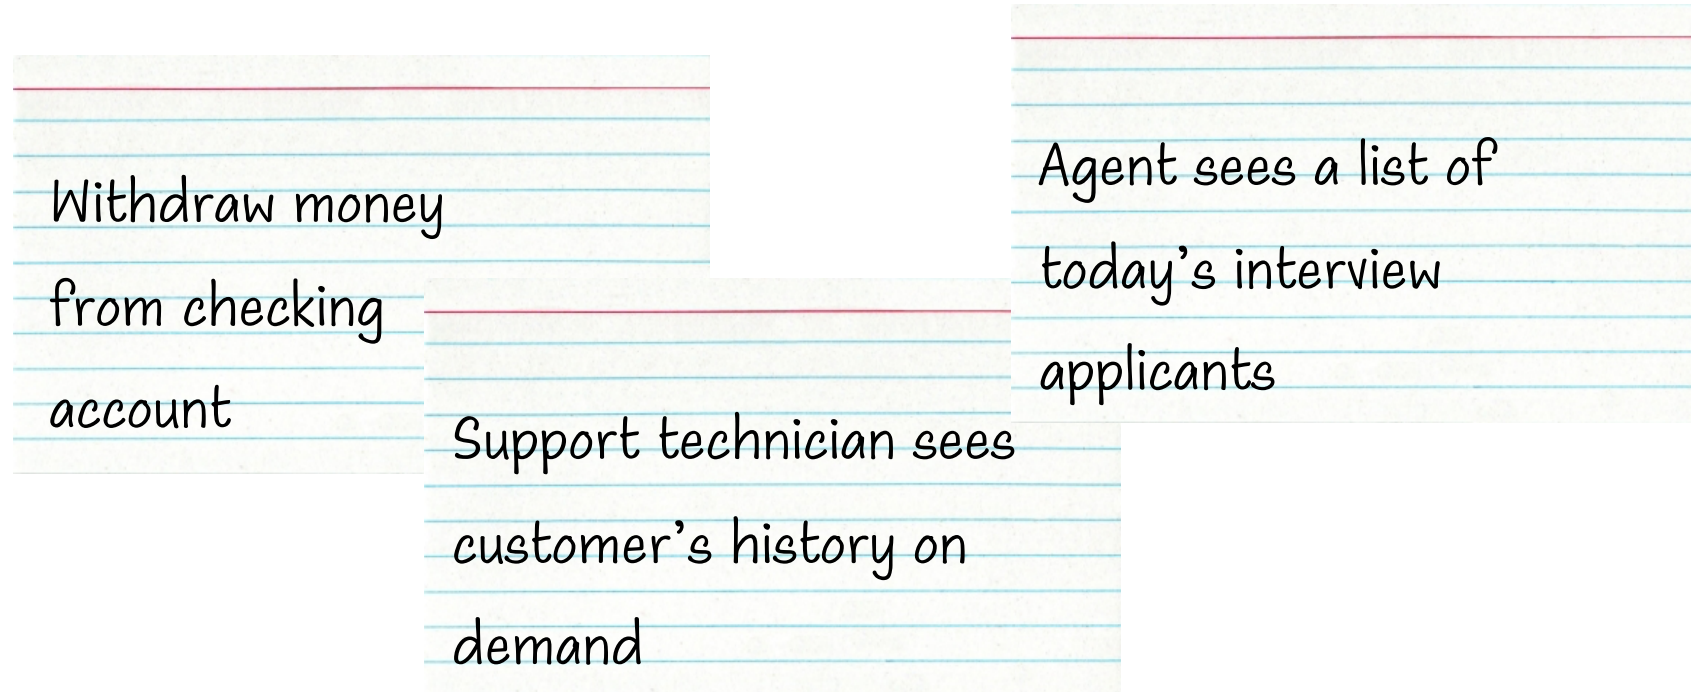

- In the language of the **end user**
- Usually small in scale with **few details**
- **Not** archived

In-class exercise


In assignment 3, you added new functionality.

Each individual in your group:
write a user story that would start the need for that functionality

Share the user stories in your group and critique them

- Are they the right size?
- Are they in the user's vocabulary?

Acceptance tests in agile methods

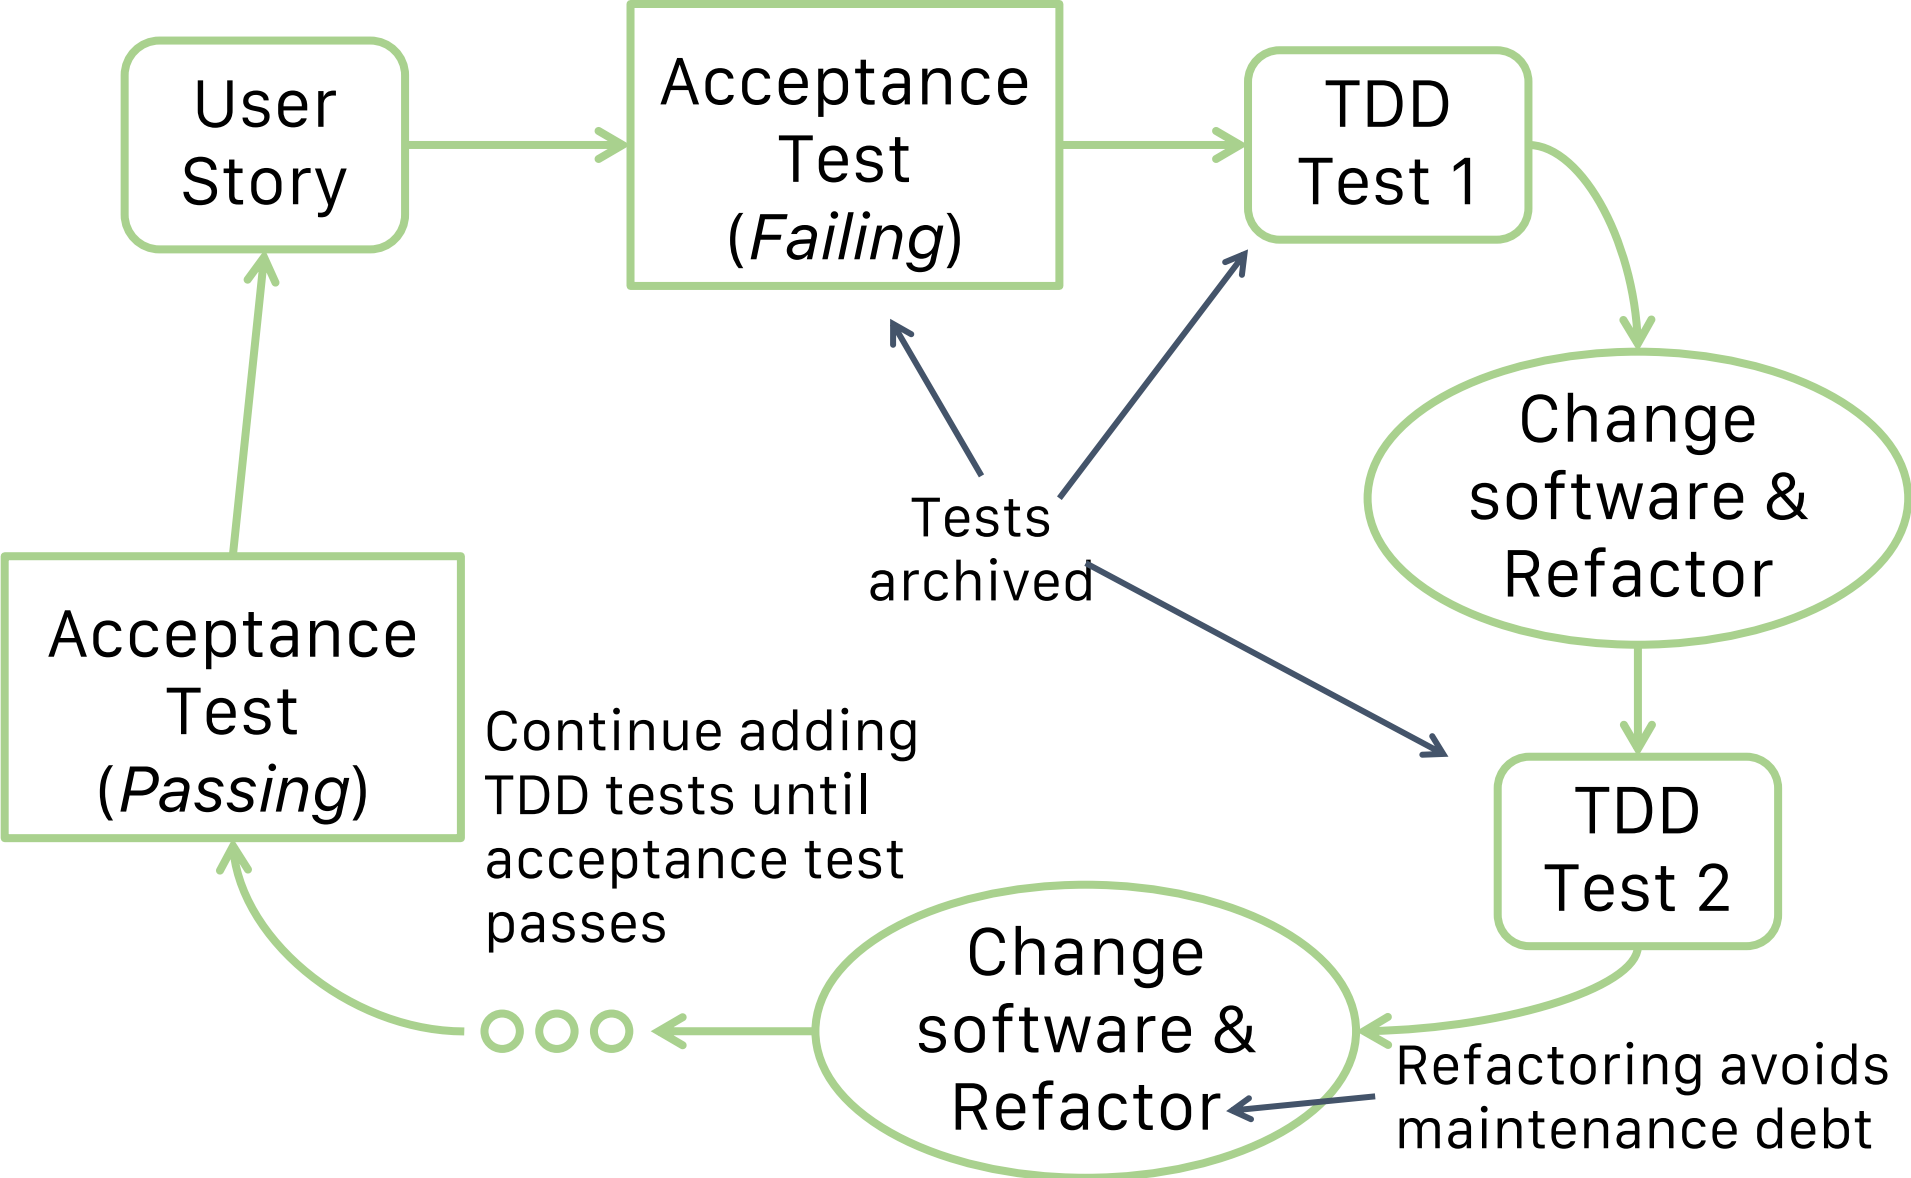

The testing shortfall

Do **TDD tests** (acceptance or otherwise) test the software well?

- Do the tests achieve good **coverage** on the code?
- Do the tests find most of the **faults**?
- If software passes, should management feel confident the software is **reliable**?

NO!



Why not?

Most agile tests focus on "happy paths"

- What should happen under normal use

They often miss things like

- **Confused**-user paths
- **Creative**-user paths
- **Malicious**-user paths

The agile methods literature does not give much guidance

Summary – take small steps

More companies are putting **testing first**

This can dramatically **decrease cost** and **increase quality**

A different view of "**correctness**"

- Restricted but practical

Embraces **evolutionary design**

TDD is definitely **not** test automation

- Test automation is a prerequisite to TDD

TDD tests aren't enough

